



2024

EQUIP MENT LIST



EQUIPMENT

LIST

- 1 LIGHTING 115+
- 2 SOUND 229+
- 3 BACKLINE 22+
- 4 SPECIAL EFFECTS 8+
- 5 VIDEO 36+
- 6 STAGE, TRUSS & ROOF SYSTEM 64+
- 7 RIGGING 9+
- 8 POWER DISTRIBUTION 18+
- 9 FIBER CONNECTION AND CABLE 8+
- 10 TRANSPORT & TRUCKING SYSTEM



115⁺

LIGHTING

- MOVING LIGHTS
- LED LIGHTING
- WIRELESS BATTERY LIGHTS
- ARCHITECTURAL & DECORATIVE
- CONVENTIONAL LIGHTS
- FOLLOW SPOT
- LIGHTING CONSOLES
- DIMMER PACKS
- DMX CONTROLLERS

ROBE**iForte****Forte**

The most powerful member of the Robe iSeries, the rated FORTE® & iFORTE® combines farreaching output and feature-rich effects in a fully protected package, capable of handling all the challenges of being outdoors.

ROBE**ROBIN® Mega Pointe**

Unleash your creativity using the bright sharp parallel beams, excellent gobo projection, precise movement, smooth CMY colour mixing and dimming plus a multitude of beam splitting, wash and shaping effects. The Robe R&D team worked with Osram to provide a 470W lamp that aligns perfectly with the cutting edge optical system. This design provides a brilliant, crystal clear, razor-edged beam, adjustable from a punchy 1.8 out to a wide 42 degree zoom.

ROBE**ROBIN® 600 LEDWash**

600W moving head LED Wash



The super-slim ROBIN® 600 LEDWash features 37x 10 Watt RGBW multichip LEDs with colour output ranging from gentle pastels to the richest saturation.

ROBE**ROBIN® Spider**

A superbright next generation of LED Wash-Beam luminaires, using 18x 30 Watt and 1x 60 Watt LEDs and combining it with a very efficient 12,5:1 zoom optical system ranging from tight 4° Beam to wide 50° Wash, makes the product the most powerful LED fixture on the market.

ROBE**LEDBeam 150**

The unique LEDBeam 150 FW offers Fresnel-Wash type of light output for even smooth edges and better color homogenization.

Attractive colorful chases and smooth transitions are powered by a cluster of high power multichip 40W RGBW LEDs.

VARI*LITE**Vari Lite VL3500 Wash FX**

1650W moving head washlight



Proudly built in the USA, the VL3500 Wash FX luminaire is the newest member of the VARI*LITE Series 3000 family of luminaires. With an output that exceeds 50,000 lumens, as well as varied new options for color and beam control.



Clay Paky Supersharpy 2

470W ACL beam type moving head

470W - 7,800 K discharge lamp, Three times brighter than the Sharpy, Adjustable beam angle from 0 to 4°, CMY mixing system with gradually fading color wheels, Rapid and extensive pan and tilt movements.



Clay Paky Sharpy 190

190W moving beam light

Sharpy is a 190W moving beam light with an unprecedented brightness usually achievable only with far greater wattages. Weighing just 16 kg, Sharpy produces a perfectly parallel, laser-like beam.



Clay Paky Alpha Profile 1500

1500W moving head beam shaper

The Alpha Profile 1500 is a cutting-edge professional beam shaper that combines the high output power of a 1500 W lamp with an exclusive framing system (patented) capable of any shape. It features an astonishing 1:9 ratio zoom, with a breathtaking speed, that makes it suitable to both short and long distance applications.



Clay Paky Alpha Spot HPE 1500

1500W moving head spotlight

This 1500W moving head is the most impressive graphic effects spotlight available, an incredible array of colour and imagery devices, including 20 gobos on 3 wheels, animation disc, rotating prism and the exclusive Automated-Star-Gobo.



Clay Paky Mythos 2

Highly advance form of hybrid light

470W, 7800K discharge lamp, Large 160mm diameter front lens, Electronic focusing for a perfectly sharp light beam along its entire length, 4°- 50° electronic zoom, CMY color mixing with gradually fading color wheels, Advanced visual effect disc (animation disc), 2 indexable rotating prisms.



Clay Paky A.leda B-EYE K20

High performance wash light

A breathtaking beam light, and a creator of completely new spectacular visual effects. LED Nominal Wattage: 15W, Number of LEDs: 37, Versatile, three operating modes: wash, beam, FX effect, Individual LED control for each parameter.



Clay Paky Alpha Beam 1500

1500W moving head beam/spotlight

Alpha Beam 1500 has the widest effect section and can be used both as a Moving Beam and a Spot thanks to the 14 gobos (6 rotating and 8 fixed), Focusing, 2 rotating prisms, CMY + color wheel, rotating beam shaper, dimmer + precision dimmer on separate channels, mechanical iris. It also offers 3 combinable linear frosts on dedicated channels.



Clay Paky Alpha Wash 1200

1200W moving head washlight

This is the top washlight in its category: a 1200W light with all the technological, structural and reliability pluses typical of the Alpha line.



Clay Paky Alpha Wash 700

700W moving washlight

Alpha Wash 700 is an extraordinarily compact lightweight 700W washlight, with the luminous efficiency, graphic and optical performance of a higher category fixture.



Clay Paky Alpha Spot HPE 700

Alpha Spot HPE 700 is the moving head spotlight of a new generation. It's silent operation and reduced power consumption is a perfect example of high performance yet environmentally conscious product.



Clay Paky Alpha Profile 700

700W moving head beam shaper

The Alpha Profile 700 is the only 700 watt automated spotlight with framing system available on the market. Focal distances have been optimised for an effective framing of well focused patterns, with triangles and quadrangles of all shapes and sizes



Clay Paky Sharpy Wash 330

330W moving head washlight

An extraordinarily compact. It is extremely silent and quick, and fitted with a complete CMY color system, special colors, 6.5°-48° zoom, beam shaping filter. It is an eco-friendly light, allowing considerable running and consumption cost savings.



Par Z Move

200W COB (Chip on Board) warm white LED on a moving head base.



Igloo Weatherproof

A tough, sturdy enclosure that offers complete protection against rain and humidity, and maintains a perfect working temperature (between 0°C and 35°C) for fixtures even in hot or sub-zero conditions.



Jolt bar FX

is a professional linear LED fixture that delivers lighting designers huge output as well as the creative potential of brilliant bright white strobe/blinder LEDs combined with multi-colored chase effects in one versatile unit.

ROBE Robe tetra1



TETRA1 is a linear bar built on the highly successful Spider and Tarrantula technology. Despite its shorter length, TETRA1 maintains the same features, quality and pixel spacing as TETRA2.

ROBE Robe tetra2



Generating an ultra-tight 4° beam from each of the 18 pixels, they combine to produce a bright, defined "sheet" of light, desired by Lighting Designers.



Flower 420D




High-power 3 Watt LED. Full Color Changing, DMX 512 Control, weather proof.



X-5 White LED Strobe



The X-5 is a white LED strobe, with 2,970 LED's, power consumption of 360W (standby power of 6W), with lamp life of 50,000 hours. Housed in a black, slim aluminium chassis, it contains 160° lens as standard, tilt of 0°-180°, 1 or 4 DMX channels and set up is via OLED 5-button graphic display.



BB4



The BB 4 washlight, is equipped with four custom Light Engines from Lamina. It is the highest power point source led light available. The performance of these light engines to i-pix's exacting colour specifications gives a tighter tolerance and improved colour performance, which makes tungsten lighting performance from the BB 4 possible.



Parade - i-PIX 12




PARADE-i-Pix 12 is a powerful full colour LED modular bar that enables an endless layout of patterns and graphic displays. It can also be used to screen low resolution video-footage owing to its ability to drive each single full colour LED independently. Featuring IP65 protection rating, self addressing technology, integrated electronic driver and full digital control over all functions.



P-5 RGBW LED Wash



The P-5 has taken the popular Palco 5 as its design base and transformed into an IP65 rated fixture - suitable for outdoor use.



POWERSHINE D RGB+W



The new generation of powerful exterior lighting and colour changing architectural wall washers by GRIVEN is topped by the latest POWERSHINE series, a high density LEDs single or double configuration modules range which features 3W power LEDs.



AL1632 STROKER MEDIUM AL1634 STROKER WIDE



Fitted with thirty-six 3W full colour LEDs and designed for refined professional use, STROKER is a super flux and high luminance colour changer for exterior and interior use.

**EXPOLITE****TourLED 37 Pro Zoom**

37 x 3 Watt High Power LED luminaire with Zoom Angles of 8 to 40 degrees & full RGBW color mixing.

**Silverstar Arc-paint 304 LED par**

Compact LED light with a powerful light output, Used on stages and medium size venues with a maximum projection distance of 35 meters. The IP67 protection ensures reliable operation of the device in architectural lighting systems in any weather.

**LED balls**

8 balls per piece of 4 meters

Outdoor DMX/ARTNET controllable 80mm diameter LED string. IP67, 8 lamps, 16W, 0.5 meter pixel distance.



Astera Titan tube FPI Astera box ART7UK

Titan is the ultimate LED tube for filmmakers, TV studios and any creative person. It emits powerful, tunable white with ultra-high color rendering as well as colored light which can be applied to individual pixels or the whole tube. The tube offers unlimited range of usage; indoor or outdoor, AC-powered or on battery, on the go with the AsteraApp, with wired or wireless DMX.



Astera Hyperion tube 2m

Astera Hyperion Tube, Twice the length, twice the power.



Astera Lightdrop AX3-CRMX-UK Astera box ART7UK

The AX3 is a battery operated, easy to use IP65 RGBW puck aimed at stage lighting and corporate events. It can be used as uplight as well as hanging or standing spotlight and inside translucent objects, truss, etc. It is extremely compact and yet offers a high brightness paired with long battery runtime and range.



Astera AX9 Wireless Spotlight

The AX9 utilizes the AX5's successful 3-in-1 concept which allows it to be used as wireless light and elegant uplight as well as a wired PAR light for longer or bigger installations. This makes it an extremely cost-efficient light and keeps your investment to a minimum.



LED bar for stage lighting

GlowUp Strip 100 is a LED bar for professional stage lighting, with mixed battery/mains power supply and mixed cable/wireless control. 10 powerful RGB-W multi-chip LEDs are arranged in a line inside a 100 cm linear aluminium housing suitable for outdoors use (IP65).



GlowUp C



GlowUp is a portable, battery-powered luminaire that removes the logistical headache of running cables at events – dramatically reducing set-up time, while saving money and improving safety. Based on durable, high-power LEDs, GlowUp offers years of energy-efficient service.



DayLED 600 Bi-Color



individual dimmer for 3200K LED's and 5400K LED's so both sets can run at full brightness in the same time resulting a color temperature of approx 4500K, LED's beam angle: 45 degree (semi-flood), built-in v-lock battery plate.



Daylight wash
2000W with barn door

The largest of the Arrilites, the Arrilite 2000 handles the broadest range of video location and studio lighting requirements.



Redhead 800W

An open face floodlight made of state-of-the-art fiber glass, the famous QUARTZCOLOR REDHEADS are a favourite of cameramen worldwide.




Bambino 650W

The Bambino 650W was developed for use in studios and on location to meet the exacting needs of industry professionals.



Quadro 10F

A Fresnel luminaire with a soft-edged beam - Variable from 7 to 45° 150mm Ø borosilicate lens - Barn-doors - Power: 650/1000W



Blonde 2000W

A Fresnel luminaire with a soft-edged beam - Variable from 7 to 45° 150mm Ø borosilicate lens - Barn-doors - Power: 650/1000W



Griven Spot 500 Fresnel Lens

Griven Arco PC 500

Theatre spot with Fresnel precise focusing by means of endless screw.



Griven Spot 1000 Fresnel Lens
Griven Arco PC 1000

Theatre spot with Fresnel precise focusing by means of endless screw.



Griven Spot 2000 Fresnel Lens

With Fresnel Lens precise focusing by means of endless screw.



Griven Arco PC 2000

Professional spotlight gives high-output for lighting applications in large theatres and stages.



Desisti Leonardo 2kw
Compact, highly efficient Fresnel lens

Provides a smooth uniform field across the entire spread of Spot to Flood focusing. It uses a single ended Quartz Halogen lamp with a colour temperature of 3200° K and it is available either in Manual or Pole Operated versions.



UV Canon
High output 400W UV fixture

With the UV Canon Ultraviolet ADJ you can create the perfect atmosphere to have your clientele coming back night after night. Ample and well controlled lighting is key to an easily enjoyed performance; the UV Cannon excels in providing you with powerful light effects with built-in features that allow ease of operation.



ETC Source Four PARNel
PAR optics with Fresnel focus

Featuring a patented wave-lens design and easy focusing knob, the PARNel lets you quickly access a range of 25°-45° – a smooth, soft, symmetrical field that you can spot or flood as needed. Enhanced Aluminum Reflector. Super-efficient HPL lamp



ETC Source Four Profile 19° 750W
750W HPL fixture, 19° field angle

Rated up to 750W, the Source Four is perfect for punching through saturated colors and performing the longest throws. 19° field-angle range.



ETC Source Four Profile 26° 750W
750W HPL fixture, 26° field angle

Rated up to 750W, the Source Four is perfect for punching through saturated colors and performing the longest throws. 26° field-angle range.



ETC Source Four Profile 36° 750W
750W HPL fixture, 36° field angle

Rated up to 750W, the Source Four is perfect for punching through saturated colors and performing the longest throws. 36° field-angle range.



ETC Source Four Profile 10° 750W
750W HPL fixture, 10° field angle

Rated up to 750W, the Source Four is perfect for punching through saturated colors and performing the longest throws. 10° field-angle range.



ETC Source Four Zoom 25°-50° 750W
750W HPL fixture, 25°-50° field angle

Rated up to 750W, Source Four Zoom gives you Source Four's crisp optics for excellent imaging and field quality. 25° field-angle range.



ETC Source Four jr Zoom 25°-50° 575W
575W HPL fixture, 25°-50° field angle

The smaller-scale Source Four jr uses the same technology that made the standard Source Four famous. That means unsurpassed imaging and beam quality. Compared to many conventional 650W and 1000W ellipsoidal spotlights.



**Spotlight RIBALTINA 4
4 Compartment Floodlight**

4-Compartment floodlight using linear halogen lamps from 150 to 1000W.
Length: 1m. Power: 150W-1000W.



Audience Blinders

8 Lamps

Professional audience blinder. Each set of four lamps is separately adjustable.



Fluorescent 6 x 55 DIM & DMX

Studio Cool 6x55W Diming & DMX is a soft light source, having constant color temperature and low energy consume without heat radiation. Studio Cool 6x55W includes 4 flexible corners to create a 360° reflective surface for enhanced light output and spill control.



Encore burst 200

High intensity, IPX4 rated audience blinder/strobe with dual 110W Warm white (2700K) CREE C.O.B. LEDs and Tungsten Mode effect.



Pin Spot 36 black



Par 56 Silver Narrow



Par 16 Silver Narrow



Pin Spot 38 Silver Narrow



Pin Spot 36 Silver Narrow



Robert Juliat Follow Spot Lancelot 4000W HTI
4000W HMI follow spot

Lancelot is not just another very long-throw followspot. A huge range of accessories, manual or motorised, can be added to make it the most powerful effect projector ever built.



Robert Juliat Follow Spot 1015 Cyrano 2500w
2500W HMI follow spot

Exclusively created to enrich traditional sceneries, Robert Juliat Cyrano is a discharge followspot HMI 2500W with manual dimmer, 3-8 degrees.



Robert Juliat Follow Spot Flo-1459
1800w MSR follow spot

With a combination of compact dimensions, high output to rival 2500 W followspots and a hot restrike lamp and electronic PSU, Flo is perfect for rental companies. It has become the new benchmark followspot for large theatres, TV studios, fashion shows, concerts and touring.



ROBE

RoboSpot Base Station SET

A device that allows follow spot operators to remotely control up to 12 fixtures simultaneously without the safety concerns and impracticality of placing personnel at the top venues such as stadiums, indoor arenas, concert halls, theatres, TV and film sets.

Operators can now safely control multiple fixtures such as the BMFL range of products (exc. BMFL Wash), T1 Profile, T1 Profile FS, DL7S, DL4S, MegaPointe and Pointe from any location within the venue, reducing set-up times and operating costs.



ROBE

Motion Camera

The RoboSpot MotionCamera is a revolutionary moving head fixture featuring an integrated HD camera remotely controlled via DMX to pan, tilt, zoom and autofocus.



ROBE

Robin BMFL FollowSpot LT

1700w BMFL follow spot

The FollowSpot LT is designed for the larger venue that requires a longer throw distance, tighter beam and greater output power. The LT is the same size and weight as the standard BMFL FollowSpot, which is substantially smaller than other products of similar power. The proprietary optical design provides a 4:1 zoom ratio (2 - 8 degrees) and an output exceeding 455,000 lux at 5 metres.



MA Lighting GrandMA2 Full Size

The new signature console of MA Lighting is the grandMA2 full-size. It controls all kinds of lighting genres like conventionals, moving lights, LEDs, video and media. Equipped with the most up-to-date technology and even some special tools (e.g. keyboard drawer or multi-touch command), full compatibility with 'series 1'-sessions.



MA Lighting GrandMA2 light

With the grandMA2 light, MA Lighting offers a compact version of the new grandMA2 full-size featuring 4,096 parameters, 15 motorized faders on board and two touchscreens. All additional features as well as all command keys are the same as with the grandMA2 full-size.



MA Lighting GrandMA2 ultra light

The grandMA2 ultra-light features the full network performance of the MA Lighting family. All controls are at the same place with the bigger consoles. With its 4,096 parameters and 6 DMX-outputs the grandMA2 ultra-light is the perfect backup solution.



MA Lighting on PC Command Wing

Real-time control for 2,048 parameters in combination with grandMA2 onPC (up to 65,536 parameters as backup in the MA system)



MA Lighting GrandMA NPU

The MA NPU (Network Processing Unit) unites the calculation power in the network and offers the same CPU power as the consoles. In total every MA NPU can deal with 4,096 parameters.




MA

MA Lighting GrandMA VPU

The Video Processing Unit is a media server, for both still and moving images, that is fully integrated into the grandMA lighting control system. A solution for controlling, live-accessing and altering video, still images and 3D-objects in real-time All videos. Several 3D Video Layers with full effects capabilities for high-resolution projections . Also Several Cameras for Shaper, Iris, FX Effects, Scaling, Camera Positions, Keystone, Softedge and 3D Objects.The VPU's Basic max resolution is HD 1280 x 720.


MA

MA Lighting 2Port Node Pro

The MA 2Port Node supplements the MA Lighting product range for networking and integrated system solutions and provides a tool for converting ethernet data to DMX data and vice versa.


ChamSys

QuickQ 20

The QuickQ 20 is the perfect choice console for control of dimmer, LED colour mixing and moving light fixtures. The console features a large 9.7 inch touch screen utilising a smart phone like interface for set-up, programming and playback of your show. The console can automatically detect and patch RDM compliant fixtures and features in-built WIFI capabilities enabling remote connection to the free QuickQ app available on iOS, Andoid and Windows tablets and phones.


WOLFMIX

Wolfmix W1

Wolfmix W1 is a standalone performance DMX lighting controller - designed for creating light shows on the fly without a computer. A toolbox of FX modules, music sync, and up to 4 DMX universes - packed inside robust hardware with a powerful processor. Choose from 1000's of light fixtures, or build your own directly inside the controller. Whether it's for a live performance, disco, club or show



Hog iPC Console

The Hog iPC console is a small, mid-range controller which offers maximum flexibility for programmers. It is designed to use the Wholehog 3 control system - so you get the most advanced features and functionality.



Road Hog Full Boar

Designed from the ground up to provide superb lighting control with powerful programming procedures, the Road Hog Full Boar expands your possibilities with an unprecedented amount of power and options. Equipped with Flying Pig Systems renowned Wholehog software, you are able to create, manage, edit, and playback lighting to enhance any production environment.



Hedge Hog 4 Console

Robust Hog 4 Operating Software, Unlimited number of simultaneous crossfades, One internal 12-inch wide touch screen, 4 encoders for an expanded wheelset, Two fixed universes of DMX 512 and up to 4 universes of DMX 512 over ArtNet or sACN, Two USB ports, Optional Custom Road Case



Pearl 2008

The Pearl 2008 is a cosmetically updated Pearl 2004 with the addition of USB memory, giving storage for the complete set of personality files as well as multiple show files.





Art 2000T Rack 48 Channels 16 amp each



Providing a complete solution to Dimming and Moving Light Power distribution. No need to have separate mains distribution making set up times faster and lowering the number of individual components needed to put a show together.



Art 2000 PowerCube



30 years of Avolites dimmer development delivers the Art 2000 Power Cube – a complete Dimming, Mains and Data Distribution Solution in one box!



Digital Dimmer Rack 24 channels x 3.7 KVA



The MA 24 channel dimmer rack is equipped with two digital dimmer units 12 x 2.3kVA. This rack is equipped with 63A power distribution including all required RCD breakers, a 24/4 hotpatch panel and 16 Harting HAN16E sockets is delivered completely wired and in full working order. All dimmer units are protected with 32A breakers per phase. The special shockproof case offers optimal safety during transport.



MAJOR SWITCH-PACK 12 channels

MAJOR SWITCH-PACK 24 channels

Switch power consumers on and off remotely via DMX



MAJOR Power Distribution 400 A

The MAJOR 19" Powerlock power distribution in the 10 HE housing distribute 400A over 48 x socapex channels



Selecon 6Pack dimmer

Philips Strand Lighting's 6pack and 3pack digital dimmer packs are perfect for portable, rack and wall-mounting applications.



W-DMX Black Box S-1 Transmitter 512c

The W-DMX BlackBox S-1 is a user-friendly single DMX universe transmitter with "One-Button-2-Go" technology. The S-1 transmits 512 channels DMX (one universe) wireless through the W-DMX technology that is proven to be safe, reliable and easy to use.



W-DMX BlackBox R-512, Receiver 512 c

The W-DMX BlackBox R-512 indoor receiver is the original BlackBox R-512 is a user-friendly receiver with "One-Button-2-Go" technology. The R-512 receives all 512 channels (one universe) DMX wireless through the W-DMX technology that is proven to be safe, reliable and easy to use.



Show DMX Transmitter

The SHoW DMX Transmitter contains a range of features that assure high data fidelity while still having the ability to minimize its effect on WiFi in the area.



Optocore DD6NE - Fast Ethernet Network Device

6 Ethernet Network Ports and External Word Clock

Usable as virtual switch in combination with other Optocore devices. Four RS485 interfaces for the exchange of control data. (e.g. RS422, RS485, DMX, MIDI), 6 RJ45 interfaces for 10 Mbit or 100 Mbit Ethernet, 2 optical 1 Gbps LINK interface with duplex SC-connectors. Dual power supply with automatic switchover, 1 USB and 1 RS232 port for configuration and control. Full remote access with OPTOCORE CONTROL software.




Optocore V3R-FX-INTERCOM

4 intercom duplex channels, RJ45 intercom I/O interfaces for matrix and for user panels, Fully compatible with Clear-Com/RTS devices, Transport of intercom audio and control data, Can work as 4 Line-In and 4 Line-Out converter via D Connector with four RS485 interfaces for the exchange of control data.



Show DMX Receiver

The SHoW DMX Receiver contains a range of features that assure high data fidelity while still having the ability to minimize its effect on WiFi in the area.

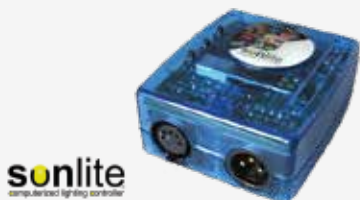

Sunlite Computerized Lighting

Computer Based DMX Controller



Avolite Truss Mount Splitter

The reliable and resilient principals of Tube Technology are utilised by Avolites in the Truss Mounting DMX splitter. Cased in a thick-wall, rigid plastic tube, the splitter is designed to attach to anything.



Grand MA Splitter

Booster & Splitter



Madrix Luna 4

The Madrix Luna 4 features 4 x 5 Pin XLR ports that distribute 1 DMX Universe each per port.



Electron SP-142

The splitter SP-142 is the ideal tool for splitting and buffering the DMX-512 signal.



233⁺ SOUND

- SPEAKERS
- SPEAKER MONITORS
- MIXERS
- AMPLIFIERS & ACCESSORIES
- EFFECTS PROCESSOR
- PLAYBACK
- MICROPHONES
- DI BOXES
- IN EAR MONITORS
- CONFERENCE
- STANDS
- COMSETS



Meyer Sound Lyon-M

Linear Line Array Loudspeaker

Meyer Sound Lyon-W

Linear Line Array Loudspeaker

As with its larger sibling LEO, LYON faithfully reproduces the source material with uncolored and consistent results regardless of level, allowing accurate translation from a studio or rehearsal space to a live concert.



Meyer Sound 1100 - LFC

1100 - LFC: Low-Frequency Control Element

The 1100-LFC low-frequency control element is a self-powered loudspeaker defined by its sonic linearity in reproducing low-frequency transients at high, continuous levels with very low distortion. This ultralow distortion, coupled with exceptional headroom and optimized rigging options, makes the 1100-LFC a flexible tool for low-end directional applications for large-scale tours and installations.



Meyer Sound LEOPARD

Compact Linear Line Array Loudspeaker

With its exceptional precision and headroom, the patent-pending LEOPARD reproduces the audio source with extraordinary accuracy, captivating audiences with both power and subtle musical detail. A truly multipurpose system, LEOPARD is ideally suited to everything from mid-sized touring and live theatre to worship and live performance installations, and from symphony music to heavy metal.



Meyer Sound LFC

900-LFC: Compact Low-Frequency Control Element

High peak power output yields excellent transient reproduction and low-frequency clarity at extreme operating levels. Tuned, vented cabinet optimized for low air velocities, Linearity and power bring new possibilities for low-frequency system design. Stackable and flyable with other 1100-LFCs in regular and cardioid arrays. Optimized to integrate with MILO, MICA, JM-1P, and other Meyer Sound loudspeakers.



Meyer Sound Galileo 616

DSP-based processing

Galileo 616: Six inputs - analog, AES/EBU or a mixture - and 16 analog outputs with full matrix mixing and routing for driving systems from small to very large. Presets for setups of Meyer Sound line array and point source systems from small to very large.



Meyer Sound Galileo Galaxy 816

816 Galileo Galaxy Network Platform

Meyer Sound Galileo Galaxy 816 AES

816 Galileo Galaxy Network Platform

The Galileo GALAXY™ 816 Network Processor is a sophisticated loudspeaker management tool for controlling all Meyer speaker types. The GALAXY loudspeaker processor harnesses open-source AVB technology to extend a new level of audio control in driving and aligning loudspeaker systems with multiple zones.



Meyer Sound Callisto 616

DSP- Based Processing

Six inputs (analog, AES/EBU, or mixed) and 16 analog outputs with full matrix mixing and routing for driving systems of any size, Robust +26 dBu outputs easily drive Meyer Sound self-powered loudspeaker systems, A/D/A conversion with 24-bit resolution at 96 kHz; digital converted to 96 kHz sample rate.



Meyer Sound UPA-1P

Compact Wide Coverage Loudspeakers

The UPA-1P loudspeaker provides high power output, low distortion, and consistent polar response in a compact, vented two-way enclosure. The loudspeaker features a 12-inch cone low-frequency driver and a 3-inch-diaphragm compression driver coupled with a 100-degree horizontal by 40-degree vertical constant-Q horn. The versatile UPA-1P has many sound reinforcement applications, as a main front-of-house loudspeaker in small to mid-sized venues, as a fill loudspeaker in larger systems, and more.



Meyer Sound UPJ-1P

Compact VariO Loudspeaker

With a 10-inch low-mid neodymium magnet cone driver and a 0.75-inch exit, 3-inch diaphragm compression driver in the high-frequency section, the UPJ-1P delivers uncompromising quality and coverage. A two-channel class AB power amplifier with complementary MOSFET output stages provides a total output of 300 watts.



Meyer Sound MM-4XPD

Directional miniature self-powered loudspeaker

The MM-4XPD directional loudspeaker was specifically designed for high-quality distributed systems in highly reverberant spaces. The directional polar pattern of the loudspeaker at low frequencies significantly reduces the excitation of the room and increases the intelligibility of the system.



Meyer Sound MM-4XP

Self powered miniature loudspeaker

The MM-4XP miniature loudspeaker is a self-powered loudspeaker designed for high-quality distributed systems. Housed in a compact aluminum enclosure, the MM-4XP is especially suitable for installations involving space limitations and visibility concerns, such as fill and spot coverage, and hidden locations like chancel steps in a house of worship. Its flexible and easy-to-configure mounting options, as well as its ability to effortlessly reproduce both speech and music, make it an excellent choice for fixed applications, theatrical presentations (stage lip frontfill), and small portable systems for corporate AV solutions.



Meyer Sound MM-10

Miniature subwoofer

The MM-10 miniature subwoofer delivers expanded low frequency for applications that require excellent audio quality from a compact system. Designed primarily as a companion to Meyer Sound's MM-4XP miniature loudspeaker, as well as the UP-4XP ultracompact loudspeaker, the MM-10 allows system designers to create full-range systems where space limitations are a concern.



Meyer Sound MPS-488HPe

Power supply

The MPS-488HP external power supply delivers DC power and balanced audio to up to eight Meyer Sound loudspeakers that require an external 48 V DC power supply. The single-space 19-inch rack MPS-488HP can be used with the UP-4XP ultracompact loudspeaker, MM-4XP miniature loudspeaker, MM-10XP miniature subwoofer, and HMS-10 surround loudspeaker.



SYVA
2-way speaker

Syva is a colinear system suited to medium throw applications. It is designed for professional sound reinforcement and high-end residential applications requiring high fidelity and SPL with minimum impact.



SYVA low
2-way speaker

Its companion Syva Low enclosure features two K2 12" drivers designed to provide low frequency contour and extended bandwidth down to 40 Hz.



D&B Q10
2-way speaker

The Q10 is a passive 2-way loudspeaker with a rotatable constant directivity horn and a passive crossover network.



D&B Q1
2-way speaker

The Q1 line array loudspeaker is a passive 2 way cabinet, providing exceptional dispersion control maintained down to 400 Hz and generating a very precise clear sound.



D&B Q Subwoofer
18 inch subwoofer

The Q-SUB for the Q-Series is a bass-reflex design incorporating a special 18" long excursion driver for a response down to 40 Hz. It is designed with the same cabinet width and identical flying fittings as the Q1 loudspeaker, enabling deployment with them in flown columns or as ground stacks.



D&B Audio Technik E12
12 inch subwoofer

The small E12 subwoofer system with its special bass-reflex tunnel produces a tremendous SPL with minimal power compression and negligible port noise when used as a bass extension for the E3 system.



D&B Audio Technik E3
2 way speaker

The E3 is an extremely small and versatile high performance system with astonishing sound and excellent headroom.



E3 Speaker Stands
Light weight stand black



YAMAHA DSR 115
2 way Bi-amp speaker

15" 2-way, Bi-amp powered Speaker, Ideal combination of ultra-precise 48-bit digital sound processing, advanced electronic and acoustic technologies delivers unparalleled high definition sound.



YAMAHA DSR 118
18" Powered Subwoofer

18" Powered Subwoofer, Bass-reflex Type





L-Acoustics KUDO

Multi-mode WST line source

KUDO offers far more flexibility than any other arena or theatre system, featuring a dual DOSC® HF waveguide and K-LOUVER Modular Directivity Technology. This combination of technologies generates eight directivity modes in both the horizontal and vertical planes and allows KUDO to fit many applications in terms of audience, geometry and content, delivers an extended LF bandwidth delivering a one source, coherent sonic experience and an exceptional ability to perform without additional subwoofers.



L-Acoustics SB28

High-power subwoofer

Exceptional power handling capability. Low frequency limit of 25 Hz. Laminar airflow vents for increased dynamic range. Reduced vent turbulence noise. LA8 amplified controller drive and protection with new preset library.



L-Acoustics LA-Touring RAK

Modular signal and power distribution

Modular touring rack designed for all L-ACOUSTICS systems. Hosts 3xLA8 for maximum drive flexibility and power. Analog Signal, Network and Power distribution panels. Engineered 9U frame allows flying and rigging. Compatible with legacy cabling standards.



EAW KF760

3 way line array module, long throw

The KF760 features EAW's advanced divergence shading where all loudspeakers are powered at equal level. A full KF760/761 array can provide uniform sound coverage from directly beneath itself out to hundreds of feet without complex signal processing.



EAW KF761

3 way line array module, medium throw

The KF761 is designed to supplement the KF760 in arrays to provide nearfield coverage for distances less than 100 feet.



EAW KF730

Compact line array module

The KF730 SLAM (Small Line Array Module) packs a six-driver, horn-loaded KF Series design into a very compact enclosure.



EAW SB730

sub for KF730

The SB730 is the compact companion subwoofer to the KF730., extending response to 35 Hz.



**EAW SB 1000 ZR**

2x18" sub bass

The SB1000z (2 x 18-inch) is a direct radiating, high output, large-format subwoofer.

**EAW LA400**

1x12" home loaded sub

The LA400 subwoofer uses bass horn technology in loading a powerful 12-inch woofer on an expanding bass horn that is eight feet in length, and provides extremely high output sub bass response in a compact, portable enclosure.

**EAW LA118z**

1 x 18 inch sub

The LA118z (single 18-inch LF) professional subwoofer is engineered to complement LA Series full range systems and any full range loudspeaker.

**EAW KF 850ZR**

3 way stage system

The KF850z has been the touring system standard for well over 15 years.

**EAW JF80z**

2 way compact speaker

The JF80z (2 x 6.5-inch woofer) is a compact loudspeaker, engineered for exceptional nearfield performance.

**EAW JF60z**

2 way compact speaker

The JF60z (1 x 6.5-inch woofer) is a compact loudspeaker, engineered for exceptional nearfield performance. It provides high output and pristine fidelity for foreground and background music applications.

**EAW NTS22**

Powered sub for NT29

The NT Series defies the conventional wisdom that PA loudspeakers can never sound as good as premium direct-radiating studio monitors.

**EAW NT29**

2 way powered speaker

The NT Series defies the conventional wisdom that PA loudspeakers can never sound as good as premium direct-radiating studio monitors.

**QSC K10.2****QSC K12.2**

The QSC K.2 Series™ represents the best-in-class loudspeaker for today's demanding audio professionals.



d&b M2 Monitor

A 2-way high performance stage monitor, with a peak sound pressure level of 143 dB. achieves a constant directivity of 45° x 60° > 600 Hz. With 2 x 12" driver / 1.4" compression driver with CD horn.



d&b M4 Monitor

A 2-way high performance stage monitor that produces 134 / 138 dB SPL. The constant directivity dispersion of 50° x 70° (h x v). With 15" driver with neodymium magnet / coaxial 1.3" exit compression driver with 3" coil and CD horn.



d&b M6 Monitor

A 2-way high performance stage monitor that produces 132 / 135 dB SPL. The constant directivity dispersion of 50° x 80° (h x v). With 12" driver with neodymium magnet / coaxial 1.3" exit compression driver with 3" coil and CD horn.



EAW SM15

15" Stage monitor

SM15 is a high-output stage monitor.



EAW SM12

12" stage monitor

The SM12 is a high-output stage monitor in an attractive low-profile enclosure.



EAW VRM12

12" passive stage monitor white


The VRM12 (coaxial design) can serve as both a floor monitor and as a standmount portable loudspeaker.



EAW SM 500iV

15" passive stage monitor



 **Meyer Sound UM-100P**

Wide Coverage Stage Monitor

Flat frequency and phase response afford high levels of gain before feedback. Symmetrical, wide constant-Q horn provides maximum freedom of movement for performers. High peak power ensures excellent transient response. Low-profile cabinet preserves sight lines.



 **Meyer Sound UM-1P**

Narrow Coverage Stage Monitor

Flat frequency and phase response afford high levels of gain before feedback. Symmetrical, narrow constant-Q horn for precise coverage. High peak power ensures excellent transient response. Low-profile cabinet preserves sight lines.



 **Meyer Sound 212A**

High-Power Stage Monitor

Our most powerful stage monitor, the MJF-212A reaches uncharted levels of onstage headroom and accuracy. It leads a new family of stage wedges that redefine high-performance monitoring once and for all.



 **Meyer Sound MJF-210**

Low-Profile High-Power Stage Monitor

A perfect balance of potent power, remarkable fidelity, small footprint, and minimal weight gives life to a high-performance monitor that meets the most rigorous demands of live production.



 **Meyer Sound MJF - 208 Monitor**

Compact Stage Monitor

The MJF-208 compact stage monitor brings the same high intelligibility and low-frequency headroom of Meyer Sound's acclaimed MJF line of stage monitors to a lighter, more portable cabinet.



 **YAMAHA Yamaha MSP 5**

Professional Studio Monitor

Yamaha's "STUDIO" series monitors have been designed with serious monitoring in mind. Emphasis is on reference-quality reproduction precision that lets you hear sonic details, rather than flattering sound



Yamaha RIVAGE PM7 144 Ch Mixing Console

(1 unit)

The RIVAGE PM7 is a digital mixing system consisting of the CSD-R7 Digital Mixing Console, one or more I/O racks for input and output, and dedicated interface cards for network connectivity. The CSD-R7 is the same size as the our flagship RIVAGE PM10 system CS-R10 Control Surface and has the same control layout. With built-in DSP it offers similarly high standards of operation and workflow efficiency in a relatively compact, portable system.



Yamaha RIO 3224 Stage Box

(3 units)

The Rio3224-D2 is a high-performance I/O unit for Yamaha's CL, QL, and RIVAGE PM series consoles. This digital stagebox is loaded with 32 great-sounding mic preamps that achieve the transparent, natural quality Yamaha is known for. The Rio3224-D2 connects directly to a Dante digital audio network, giving you flexible system configuration at up to 96kHz. You also get four stereo AES outputs. Enjoy peace of mind, thanks to dual redundant power supplies. You can also daisy-chain connections. Beyond that, you'll benefit from local control of gain and other parameters. The live sound pros at Sweetwater appreciate how the Rio3224-D2's character display offers easy visual confirmation of your settings.



Digico SD10 - 36 Digital Mixing Console

Driven by Stealth Digital Processing and floating-point Super FPGA technology, the SD10 packs the power and flexibility to meet even the most demanding requirements. Ease of operation is assured with three banks of 12 motorised faders and one master fader, each with its own high resolution LED bar graph meter. All functions are quick to hand courtesy of the centrally located 15-inch backlit colour-keyed TFT touchscreen.

With the SD10, flexibility comes as standard: recall or save presets on the channel strip; recall or save snapshots using the master screen or simply use the dedicated switches on the surface. Special functions can be assigned and accessed instantly via 40 Smart Key Macros, accessed via four layers of 10 RGB backlit keys.



Digico SD-Rack

With support for up to 192kHz high resolution analogue I/O converters plus a comprehensive range of digital formats, it's no wonder that the SD-Rack is accepted as the finest I/O rack available. From MADI to AES/EBU, Dante, AES-42, ADAT, or Aviom, the SD-Rack has it all.



DIGICO Digico SD8

Complete 56 channel digital console with 48/8 stage rack with digital madi snake.



2 x Digico local rack,
32 in, 40 out, 16 AES in/out.



2 x Digico stage rack 56 in, 8
out.



2 x Optocore fiber optics
100m.



MIDAS Midas M32

Digital Console for Live and Studio with 40 Input-Channels, 32 Midas PRO Microphone Preamplifiers and 25 Mix Buses and Live Multitrack Recording.



MIDAS Midas DL32

32 Input, 16 Output Stage Box with 32 Midas Microphone Preamplifiers, ULTRANET and ADAT Interfaces.



MIDAS

Midas Pro X

Midas Pro9

Dual "Daylight Visible" Screens with 3-way KVM switch, XL8-Style "Fast Zones", XL8-Style Dual Operator "Channel Strips", 10 VCAs, 6 POPulation Groups, Configurable "Area B", 16 Input Faders, Up to 80 simultaneous mix channels, 16 Group/Aux & 16 Matrix - 32 Mixes in "monitor" mode, Surround panning including LCRS, Quad and 5.1, Dual-Redundant Linux Control Computers, Dual-Redundant HyperMac (192x192) digital snake included, 8 Fully-assignable FX engines – with new FX options, Up to 36 KT Graphic EQs.



Audio System Engine (DL371)

The PRO6 and PRO9 processing engine is a rack mount unit, which houses up to 7 audio processing modules and routing hardware.



Audio System Input Splitter (DL431)

The DL431 is a fixed configuration unit which features 24 mic / line inputs. Each input feeds three separate preamps, two with separate gain controls, the third being fixed gain.



Modular I/O (DL351)

The DL351 is a unit that can provide 48 audio inputs and 16 audio outputs.

(DL252)

The DL252 is a unit that can provide 16 audio inputs and 48 audio outputs.



KLARKTEKNIK

KLARK TEKNIK DN9696 High Resolution Audio Recorder

This High Resolution Audio Recorder offers 96 tracks of 96kHz audio at 24bit, with a massive 9 hours of internal storage.



MIDAS

Midas Neutron Audio System Engine for Pro X

The Neutron from Midas is a high-performance audio system designed to be the heart of the Pro X live performance digital mixing system. The unit features a HyperMac router capable of 192 bi-directional channels with 40-bit floating point processing and a sample rate of 96 kHz. The standard four DSP cards provide N+1 redundant operation, while the dual-redundant connection to the control center offers enhanced reliability.



KLARKTEKNIK

KLARK TEKNIK DN9650 Network Bridge

The DN9650 network bridge allows the AES50 interfaces on MIDAS PRO Series digital audio systems, MIDAS I/O units to connect to third party multichannel digital audio networks.



Yamaha LS9 32

Digital Mixing Console 32 Channels

Yamaha LS9 16

Digital Mixing Console 16 Channels

While being compact and light enough for one person to move and set up easily, both models include features that have been field-proven in previous Yamaha digital consoles as well as outstanding sonic quality.



Yamaha TF 5

Digital Mixing Console

The TF5 console itself provides 32 analog XLR/TRS combo mic/line inputs with 48V phantom power, as well as 2 analog RCA stereo line inputs, and 16 analog XLR outputs. Each combo input channel features a recallable D-PRE microphone preamp, as well EQ and two dynamics processors. In addition, the console offers eight powerful FX processors with patches ranging from reverb and delay, to modulation effects such as flanger and chorus, to utility processing like 3-band multi-band compression.



MG166CX-USB

Analog Mixer 16 Channels

High Quality mic preamp, 10 Mics + 4 Stereo line inputs 2 AUX sends + 1 EFFECT send, 6 buses (Stereo + 4 groups) HPF(CH1-12), 3 band Mid-sweep EQ(CH1-8), COMP(CH1-6), SPX Digital multi effect, Rack Mountable (12U), USB Connector, CUBASE AI4 Included.



MG12XU

Analog Mixer 12 Channels

Yamaha MG12XU 12 is 6 Mic / 12 Line Inputs (4 mono + 4 stereo), 24-bit / 192kHz 2in / 2out USB Audio functions offering high-quality Neutrik balanced XLR connectors on mono microphone/line channels and XLR equipped stereo channels and High resolution SPX effects.



Digital Mixer O1V 96 VCM

(1 unit)

Digital Mixer O1V 96i VCM

(1 unit)



Perfect for professional applications where space is limited or maximum portability is required. It handles up to 40 inputs. Comes with a selection of Yamaha's unsurpassed VCM effects built in.



Soundcraft
HARMANI

Soundcraft EPM12

Analog 12 Channel

The EPM series expands Soundcraft's line of top-notch compact mixers. It combines all the features of Soundcraft's popular MPM mixer and adds a built-in 24-bit digital Lexicon effects processor.



Soundcraft
HARMANI

Soundcraft Spirit FX16

Analog 16 Channel with Lexicon Effects

The FX16 offers a combination of powerful live and recording features, with enough channels and direct outputs to enable use with 16-track recording systems. It features a specially designed 16 program Lexicon Effects Section with dual effect capability (including Chorus and Reverb, Chorus and Delay, and Reverb and Delay) and fully editable and storable programs and parameters.



Soundcraft
HARMANI

Soundcraft EPM8

Analog 8 Channel

The EPM8 boasts eight of Soundcraft's highly-transparent GB30 mic preamps - the same pres used on the larger LX7ii and GB series consoles. With two aux sends, two groups, a 3-band EQ and much more, your budget goes a long way with the Soundcraft EPM8.



ALLEN & HEATH

Allen & Heath SQ5

SQ-5 is built for professionals in demanding live sound, recording and streaming applications. Delivering class-leading high-resolution audio with an ultra-low 0.7ms latency, the SQ-5 gives you unrivalled power and audio fidelity.



Pioneer
Pioneer DJM - 900NXS2
 4CH DJ Mixer

The Pioneer DJ DJM-900NXS2 features Pioneer DJ's first ever 64-bit mixing processor for a warmer, more nuanced sound along with fine-tuned EQ, fader curves and enhanced the FX controls. Plus the DJM-900NXS2 has an independent Send/Return, 4 phono inputs and 2 USB ports for connecting to Serato DJ with the addition of the DJ Essentials license.



Pioneer
Pioneer DJM MIXER
 DJM 800

The DJM-800 mixer gives professional DJs the tool they need to expand their musical horizon, with capabilities for mixing records, remixing, producing and performing. Pioneer's DJ mixers have a reputation for providing high quality audio and reliability.



MACKIE
Mackie 402-VLZ3
 Ultra-Compact 4 Channel Mixer

Ultra-compact 4-channel mixer featuring Mackie VLZ3's signature low noise, high-headroom design. 2 studio-grade XDR2™ Extended Dynamic Range mic preamps & 4 high-headroom line inputs.



DENON DJ
Denon DJ MIXER DN-X500

Rock solid construction, superb audio fidelity, high quality parts. The DN-X500's unique features provide Mobile and Club DJs tremendous flexibility and intuitive control. Eight-channel input matrix routing gives you the freedom to move any source to any channel or even the same source to multiple channels for remixing.



ALLEN & HEATH
Allen & Heath ZED i10 Fx

ZEDi-10FX combines the robustness and hands-on control of an analogue mixer with a high quality 4 x 4 USB interface and an outstanding multi-model FX unit, making it a perfect all-round choice for musicians, recording artists and venues.



L-acoustics LA4X

System amplifier (class D) with an output power of 4 x 1,000 W RMS into 4 or 8 ohms, A/D converters and integrated DSP processor. Flexible 4 x 4 matrix with 4 inputs and 4 outputs. Power supply via SMPS (Switched Mode Power Supply) with power factor correction (PFC).



L-acoustics LA8

Cutting edge loudspeaker amplification, DSP, network. High-grade 24 bit A/D converters, 130 dB dynamic range, 32 bit floating point SHARC DSP, 96 kHz sampling rate, 4 channel high efficiency amplifier section fed by 2 inputs, LA8 4X1800W/4 Ohms. Advanced dual IIR/FIR filter algorithms, Exclusive L-DRIVE system protection, Complete onboard L-ACOUSTICS preset library, LA NETWORK MANAGER RC software & monitoring. Ready for future multi-channel digital audio network.




LAB.GRUPPEN

Lab.gruppen PLM 10000Q

4 channel power amplifier with dolby lake processing

The PLM 10000Q, the first in Lab.gruppen's PLM Series, combines cutting-edge technologies from two of the leading innovators in the live event production industry: Dolby Lake and Lab.gruppen.



D&B D12

2 channel power amplifier with built in processor

The d&b D12 amplifier is a dual channel amplifier incorporating digital signal processors (DSP) to provide loudspeaker specific configurations and functions. It is designed for use with all d&b loudspeakers.





Lexicon PCM 81

Digital Effects Processor

The PCM 81 Digital Effects Processor has everything that made the PCM 80 the top choice among studio effects processors – and more.



YAMAHA SPX2000

Reverb unit

The SPX2000, while inheriting the standard interface and common programs from its predecessors, brings a new dimension to the sound quality with the new "REV-X" reverb algorithm and the 96kHz audio DSP.



Klark Teknik Octa

8 channel comp gate



DBX 160A

Single channel compressor



BSS DPR 402

Dual Compressor / Limiter

The DPR-402 is a 2-channel compressor/limiter, high frequency de-esser



BSS DPR-901 II

Dynamic Equalizer



TC Electronic Reverb 3000

Reverb unit

The M3000 has some of the best sounding, most versatile and easy-to-use professional reverbs for music.



TC Electronic D-TWO

Multitap Rhythm Delay Processor



Klark Teknik DN 360

Stereo Graphic EQ



DBX 215

Dual 15 band Graphic EQ



BSS DPR 504

4 Channel Noise Gate

The DPR-504 is a 4-channel noise gate. The Range switch selects between 70dB and 20dB gating depth to provide alternative release profiles.



Numark

Numark iDJ2 - DJ System for iPod

iDJ2 is the first mixing station that enables you to play two tracks simultaneously from the same iPod. iDJ2 is a powerful DJ performance device with a dual-deck layout, a professional Numark DJ mixer, Numark's exclusive Crate music-management system on a color LCD and a dock for iPod. You can perform with nothing more than iDJ2 and an iPod!



TASCAM

Tascam CD 01U

Professional CD Player



TASCAM

Tascam DA-3000

Combined High-Quality Master Recorder and High-Quality ADDA Converter (2 units)



Denon DN-D6000

DN-D6000 Dual CD/MP3 Player



Denon DN-C635

Single CD Player



TASCAM

Tascam MD 350

Mini disc player recorder



TASCAM

Tascam CD-900 WL

CD Player CD Recorder



Pioneer
Pioneer CDJ 1000MK3
 CDJ 1000 MK3



Pioneer
Pioneer CDJ - 2000NXS
 DJ CD Player



Pioneer
Pioneer PLX - 1000
 Professional direct drive turntable



Pioneer
Pioneer CDJ-3000LSYXJ Multi Player
 Professional DJ multi player



360 Systems Instant Replay

10 banks of 50 clips, 24 hours of playback time.



Fostex
Fostex CR500
 CD Player CD Recorder



HHB
HHB UDP-89

The ultimate universal dvd/cd player

DVD playback is an ever-expanding requirement in virtually every type of AV installation, from broadcast facilities and boardroom presentations to public information displays and entertainment systems.



Shure SM 94

Cymbals, ensembles & overheads

The SM94 is a unidirectional electret condenser microphone tailored to the instrument miking needs of professional musicians and sound engineers in both live performance and sound recording.



Shure SM 58

Hand held cardioid vocal

Legendary Shure SM58® vocal microphone, tuned to accentuate the warmth and clarity of lead and back-up vocals. Consistently the first choice of performers everywhere.



Shure SM 57

Instrument Mic for drums, percussion, brass & guitar amps

Multi-purpose Shure microphone with contoured frequency response for clean sound reproduction of amplified or acoustic instruments.



Shure Beta 87

Hand held supercardioid vocal

The Shure Beta 87A is a premium quality supercardioid hand-held electret condenser vocal microphone with exceptionally smooth frequency response and high sound pressure level capability.



Shure Beta 58

Hand held cardioid vocal

The Shure Beta 58A® is a high-output supercardioid dynamic vocal microphone designed for professional sound reinforcement and project studio recording.



Shure Beta 57

Instrument Mic for drums, percussion, brass & guitar amps

The Beta 57A is an excellent microphone designed for use with amplified or acoustic instruments. The compact grille design gets the microphone cartridge close to the sound source. Supercardioid, Dynamic.



Shure KSM 109

Drum Overheads

Both the acoustic environment and microphone placement strongly affect the sound obtained from miking a source.



Shure Beta 98D/S

Clip on drum mics

A tiny microphone that provides a versatile solution for high-volume instrument applications. Its supercardioid design provides maximum isolation from other onstage sounds.



Shure Beta 52

Bass instrument mic

Optimized for low-frequency bass punch and high-power SPL handling, the Beta 52A's supercardioid design provides maximum isolation from other onstage sounds.



Shure Beta 98AD/C



Shure SM 81



Shure Beta 91

Boundary layer mic

A low-profile microphone that requires no external mounting hardware. Lies flat on a pillow or other surface inside a kick drum for superb attack and low-end punch.



Shure PG58 Radio Mic

It's never been easier to go wireless and sound like a pro. Shure PGX Wireless brings the superior sound of Shure Microphones together with innovative automatic setup features.



DPA 3511 Stereo Set

Acoustic guitar, piano, overheads, percussion, wind instruments

The 3511 is a complete stereo kit for a broad range of recording applications using two 4011-TL Cardioid Microphones.



DPA 3506 Stereo Set

Acoustic guitar, piano, overheads, percussion, wind instruments

The DPA 3506 is a complete Stereo Kit with two carefully factory-matched phantom powered condenser microphones.



DPA 4099

The 4099 Instrument Microphone is already the recognized standard for this type of microphone and the CORE version adds just another layer of sound quality that further distances this mic from its competitors. 4099 brings more clarity and details to your music, across the entire dynamic range.



DPA 4061

Black Miniature Condenser

DPA 4061 is acoustically identical with the 4060, but the sensitivity is adjusted to match some of the more sensitive transmitters on the market.



DPA SMK 4060

Miniature Condenser with various clips

The SMK4060 Stereo Microphone Kit is a cost-effective and flexible stereo recording solution aimed at project studios and for discreet mic setup on stage.



DPA 4060-BM

Black Miniature Condenser

This type is a prepolarised omnidirectional Miniature Condenser Mic with a 5.4 mm vertical diaphragm specially designed for maximum performance under the often difficult conditions when mounted directly on the human body.



Countryman Isomax

Headworn miniature mic

It's no surprise that Countryman's E6i Omni Earset is a top choice for presenters, educators, worship leaders and pastors, broadcasters, and many, many more.



DPA 4011 - TL

The first order cardioid pick-up pattern gives superb separation between sound sources while spot-miking on every kind of live music.



DPA 4060 - BM

Beige Miniature Condenser

This type is a prepolarised omnidirectional Miniature Condenser Mic with a 5.4 mm vertical diaphragm specially designed for maximum performance under the often difficult conditions when mounted directly on the human body.

**DPA 4088 - F**

Headworn Miniature Mic

DPA 4088 is a miniature cardioid headband built on the finest DPA experiences in microphone design and manufacturing.

**DPA 4466 - OCR B00**

black

headset microphone with an advanced, fully adjustable, stainless steel headset mechanism.

**DPA 4466 - OCR F00**

beige

Adjustment mechanism for a quick and an easy size adjustment. One-size fits all head sizes and shapes

**DPA DAD 6001 BC**

Miniature mic adapter for xlr cables

**DPA DAD 6010****DPA DAD 6003**

SCHOEPS
Mikrofone

Collette Modular System

CMC6-U with Cardioid Capsule MK4

This microphone capsule has the same features as the MK4, but in addition emphasizes the frequency response in the 9 kHz region by 4 dB.

**Neumann TLM 103**

The TLM 103 is the ideal large diaphragm microphone for all professional and semi-professional applications requiring the utmost in sound quality

**Neumann KM 184**

6 matched stereo pairs

The KM 184 is the ideal small diaphragm microphone for all professional and semi-professional applications requiring the utmost in sound quality



Rycote

Cyclone Windshield Kit - XLR

The Cyclone has superb acoustic transparency. Designed with an open shell structure consisting of curved contours and no straight or parallel surfaces, it greatly reduces room-tone effects inherent in conventional tubular windshield designs.





Schertler DYN GP SET

For grand pianos

The Grand Piano Model "DYN-GP", which utilizes a matched pair of transducers, provides an even greater sense of space as the sound can be captured in two separate points thus, achieving a more balanced tone.



Schertler DYN B SET

For upright double bass

Perfect amplification of the acoustic double bass has been a long-time dream for most jazz bassists. The DYN-B is simply the most natural double bass transducer in the world.



SENNHEISER Sennheiser MKH 416

The MKH 416 is a short gun interference tube microphone. Its excellent directivity and compact design, high consonant articulation and feedback rejection make the MKH 416 a superb all-round microphone for film, radio and television, especially for outside broadcast applications.



Shure MX412D/C

Goose neck table conference mic with on off stage



Microflex Standard Gooseneck microphones bring a whole new meaning to the word flexible with their fully adjustable gooseneck.



SENNHEISER Sennheiser MZH 3040

The MZH 3040 is a metal gooseneck for use with the ME 34, ME 35 and ME 36 microphone heads. The rugged gooseneck is fitted with a balanced, floating XLR-3 output, enabling the microphone to be powered from 12 - 48 V phantom power and has a length of 400 mm.



SENNHEISER Sennheiser MAT 133

Featuring a rugged housing, the functionally and unobtrusively designed MAT 133 provides a solid ground for XLR3 gooseneck microphones.



SENNHEISER Sennheiser ME 34

The ME 34 is a permanently polarized condenser microphone head for use with Sennheiser MZH goosenecks. This cardioid capsule is suitable for a very wide range of applications including: presentation, conference, public address, studio, broadcast, video and others.



ADX2 Handheld Transmitter with KSM8B Capsule

Neutral mid and high - frequency reproduction due to controlled proximity effect results in the most natural-sounding dynamic microphone available.



**ADX2 Handheld Transmitter with SM58B Capsule
AD2 Handheld Transmitter with SM58B Capsule**

The AD/SM58 is a handheld wireless microphone transmitter compatible with Axient® Digital Wireless Systems.



ADX Showlink Access Point with AD160

The AD610 ShowLink™ access point enables real-time remote control of all ShowLink-enabled Axient™ transmitters, including both ADX and AXT series models.



**ADX1 Bodypack Transmitter
AD1 Bodypack Transmitter 6**

The AD is a wireless bodypack transmitter compatible with Axient Digital Wireless Systems.



HA-8089 Helical Antenna 470-900MHz

Helical antenna provides greater bandwidth and longer range gain for receivers, transmitters, and distribution systems.



**AD4Q
AD4D**

The digital receiver sets a new standard in spectral efficiency. Groundbreaking performance features include wide tuning, low latency, High Density (HD) mode, and Quadversity, ensuring solid performance in the most challenging RF environments.



**Axient AXT600 Spectrum Manager
470-952 MHz**

Axient Spectrum Manager delivers wide-band UHF spectrum scanning, spectrum analysis, and compatible frequency coordination in a single rack unit.



**UA845UWB Ultra Wideband ANTPWR
Dist System**

The Shure Model UA845UWB Antenna Distribution System allows four receivers to use the same set of antennas. The cascade connectors allow connections to a fifth receiver or a second UA845UWB.



Shure UR2 Beta 58A

The Beta 58A microphone accentuates the warmth and clarity of lead and backup vocals. Its supercardioid design provides maximum isolation from other onstage sounds.



**Shure UR2 Beta 87A Capsule
Shure UR2 KSM 9 Capsule
Shure UR2 SM58**

Outdoors or indoors, singing, speech - the SM58 is the overwhelming choice of professionals.



Shure UR1

Bodypack transmitter for miniature mics

The UR1 transmitter is a compact bodypack, constructed of lightweight metal to be exceptionally unobtrusive and abuse-resistant.



Shure UR4D

Dual radio mic receiver


UR4D receivers provide single and dual-channel options for Shure's premium wireless. The latest technologies provide advanced control and robust flexibility for a wide range of professional uses.



Shure UA845-UHF

Antenna distribution unit

The UA845 UHF Antenna Distribution System is designed for large UHF or UHF-R wireless systems. Each unit allows up to four wireless receivers to use the same two antennas, and the CASCADE ports allow connection to a fifth receiver or a second UA845.





SENNHEISER
Sennheiser A 3700

Omnidirectional antenna



SENNHEISER
Sennheiser AD 3700

Directional antenna



SENNHEISER
Sennheiser SK 5212-II

Switchable output power, Very compact and rugged housing, Audio sensitivity adjustable in steps of 1 dB from -30 to +40 dB.



SENNHEISER
Sennheiser KK 105-S

Neumann Supercardioid capsule.



SENNHEISER
Sennheiser MD 5235

MD 5235 has been acoustically optimized for loud stage use, its sound characteristics allowing the vocalist to cut through high sound levels on stage.



SENNHEISER
Sennheiser ME 5005 e

Condenser mic head



SENNHEISER
Sennheiser SKM 5200-II

Up to 184 MHz switching bandwidth, Low-inter-modulation mode (Lol), Switchable output power, Award-winning design



SENNHEISER
Sennheiser EM 3732-II

Up to 184 MHz switching bandwidth, Digital AES 3 audio output with external word clock synchronisation, Integrated antenna splitter for daisy-chaining up to eight devices, Intuitive user interface with OLED display.



SENNHEISER
SKM 100 G3

With rugged design and powerful sound, it is ideally suited for the stage as it is in the auditorium. Newly revised features such as the enhanced graphic display, easily swappable capsule and included charging contacts.



SENNHEISER
SKM 100-835 G3-1G8

Robust cardioid handheld microphone/transmitter for the 1.8 GHz band. Fit for every vocal style. Lively, powerful sound. User-friendly menu operation with backlit graphic display. Sturdy metal housing.



SENNHEISER
ew 122 G3-GB

High-quality presentation set: ME 4 cardioid clip-on microphone for prominent voice reproduction free of background noise, EM 100 G3 true diversity receiver, SK 100 G3 bodypack transmitter.



SENNHEISER
Sennheiser EW 135 G2 Vocal Set

Handheld transmitter with MD 835 dynamic cardioid capsule and rack-mountable receiver



Radial Engineering J48™

The Radial J48 has been designed from the ground up to deliver the most natural tone. As a direct box manufacturer, we do not believe it is our task to alter the sound of your prized '1962 Fender Jazz Bass', but retain and transfer the true character of the instrument to the mixing console without adding distortion or introducing artifact. This design philosophy has gained a tremendous following from many of the world's most demanding musicians.



Radial Engineering USB-Pro™

The Radial USB-Pro is a high-resolution stereo digital audio converter (DAC) and direct box that is designed to connect to any computer system to seamlessly transfer digital audio to analog. A stereo pair of balanced XLR audio outputs with adjustable level control then feeds the signal to a microphone preamplifier, PA system, mixing console or even a powered speaker!



Radial JS2 DI

The JS2™ is a high performance balanced mic-level splitter designed to send a signal to multiple destinations simultaneously, with one transformer-isolated output and two direct outputs.



Radial Engineering StageBug™ SB-5

The Radial Stage Bug SB-5 is a compact stereo direct box designed to accommodate laptop computers, tablets and other consumer audio products when amplifying the signal through a PA system.



Klark Teknik DN100

DI Box for acoustic instruments




LD Systems LDI 02

DI Box for acoustic instruments




BASN Bsinger PRO IEM Headphone

Dual High-Definition Micro-speakers with powerful neodymium magnets. A good combination of high, medium and low frequency makes this monitor has smooth and clear crisp natural sound. Designed by a senior ergonomic engineer, our headphone has the most efficient house without saving of sound quality. It will perfectly fit your ears with a comfortable weight.



Fischer Amps Mini Body Pack

is a passive, wired monitor bodypack with volume control for use with headphones or earphones. Fixed at the belt with a clip and connected to a power amp via a cable, it is designed for a keyboardist, drummer, or other musician for performing on stage or in the studio.



Fischer Amps In Ear Amp8

The perfect solution to provide up to eight musicians with an in ear mix. The half rack-space In Ear Amp 8 with eight XLR outputs is based on the Fischer Amps In Ear Amp 2. Musicians can control their volume individually with Fischer Amps Mini Body Packs.



SENNHEISER
Sennheiser ew 300 IEM G3

SR 300 G3 stereo transmitter
 EK 300 G3 stereo bodypack receiver

1440 tunable UHF frequencies for interference-free reception, Absolutely reliable transmission and extended range due to high RF output power, Pilot tone squelch for eliminating RF interference, Automatic frequency scan feature searches for available frequencies



SENNHEISER
Sennheiser ew 300 IEM G2

SR 300 G2 stereo transmitter
 EK 300 G2 stereo bodypack receiver

1440 tunable UHF frequencies for interference-free reception, Absolutely reliable transmission and extended range due to high RF output power, Pilot tone squelch for eliminating RF interference, Automatic frequency scan feature searches for available frequencies.



SHURE
Shure PSM 900

The PSM@900 Wireless Personal Monitor System from Shure offers an unprecedented combination of superb audio quality.



SHURE
Shure PSM 400

Hardwired Bodypack for use with PSM 400 personal Monitor Systems.



SHURE
Shure PSM 700
 PSM 700 in Ear personal monitor

The PSM@700 series offers advanced controls and features that make it easy to quickly locate and lock in the clearest frequency, prevent distortion and minimize the number of antennas required to send mixes.



FURMAN
PL-PLUS C E

The Classic Series features Furman's revolutionary Series Multi-Stage Protection (SMP), Linear Filtering Technology (LiFT), and Extreme Voltage Shutdown (EVS). Together, these technologies comprise what is, without question, one of the world's most advanced and comprehensive transient voltage surge suppressors.



Shure P10R

Diversity wireless bodypack receiver offers premium features for use with the PSM 1000 In-Ear Personal Monitoring System. Includes RF Scan, twin-antenna diversity stereo encoding, Cue-Mode for monitoring different mixes, and Mix-Mode Technology.



Shure GL10WP Domed Helical Antenna

The Domed Helical Antenna offers unparalleled drop-out free RF performance for IEM, wireless mics and intercoms.



Shure P10TUK K10E Wireless Transmitter

Shure's P10T Full-Rack, Dual-Channel Wireless Transmitter combines state-of-the-art technology with touring-grade features for professional monitoring applications of any size with no room for error.



**Shure Antenna Combiner
470-865 MHZ 8 Channel**

Shure PA821B Antenna Combiners are complementary accessories for Shure PSM Personal Stereo Monitor systems. When multiple systems are required for monitoring environments, the PA821B combiners quietly and efficiently reduce rack clutter and optimize RF management for up to eight PSM@900 transmitters or up to four PSM@1000 transmitters when racked in a central location.



Luminex Gigacore 16XT

The GigaCore 16Xt is a Gigabit Ethernet switch designed to cope with the most demanding lighting and AV installations. Managed through an intuitive web interface, the unit can also be configured from the front end display, making this switch a hassle-free solution for your everyday job. Four SFP cages also offer users to create complex network topologies over fiber link, such as mesh or ring.



Luminex Gigacore 10

The GigaCore 10 is by far the most versatile Luminex Gigabit switch ever built. The half 19" unit with front and rear connectivity is designed to be mounted in a truss, in a rack, or even on a wall. The robust metal enclosure and rugged Ethercon and (optional) Fiber connectors make this unit excel in truss-mounted applications with Ethernet-enabled devices, such as moving lights, PA systems, microphones, cameras, or general stage connectivity.



MXC620

The MXC620 Portable Conference Unit provides clear sound and intuitive control for meetings and conferences and complements both contemporary and historic meeting spaces. The MXC620 can be used by a chairman, a single delegate, or shared by two delegates* with the Microflex Complete Digital Conference System.



MXCIC

Professional interpreter console with 3 outgoing language channels, 8 relay channels, and color display. ISO 20109-compliant.



MXC640

The MXC640 Touchscreen Conference Unit features a color touchscreen that displays conference information and controls that make meetings more productive. An integrated ID card reader allows standard NFC cards to be used to identify attendees by name or control access.



MXCW640

The MXCW640 Wireless Conference Unit combines a microphone, loudspeaker, and user controls in an integrated wireless unit that complements any meeting space.



MXC Sign

Dual sided e-paper information display which identifies conference participants. Used with MXC and DCS 6000.



ANI22-XLR 2 channel in and out

The ANI22 can bring up to two line / mic signals onto or from a Dante network for easy audio routing and convenient browser-based remote control. Available with XLR or block connectors.



DIS-CCU control unit

Central control unit for use with MXC-series, 5900-series, or 6000-series conference and discussion units. Supports up to 250 discussion units and 2 interpretation channels, or up to 3,800 participants and 31 interpretation channels with optional feature licenses and expansion hardware.



MXCWNCs network charging station

The MXCWNCs Networked Charging Station charges 10 SB930 batteries in 4 hours. LED indicators display charge status, and a RJ-45 Ethernet connection enables battery levels to be monitored remotely. Includes IEC power cable and mounting hardware for wall or rack mounting.



IH6500 interpreter headset

Gives interpreters more freedom of movement. Flexible microphone boom can be worn on left or right side. Includes 3.5mm TRRS & DIN adapter cables.



DH6021 stereo headphone

The DH 6021 is a comfortable, light-weight dynamic stereo headphone for conference and assistive listening applications. The headphones have soft ear pads that are easily replaceable and have a durable reinforced cable with a 90° stereo connector.



MXC420DF goose neck 20"

MXC Dualflex Gooseneck Microphones have flexible sections at the top and bottom provide additional control in meetings and conferences.



JB6104 tap out box

The junction box can be used with the MXC, DDS 5900 or the DCS 6000 systems and provides four tap-outs from the daisy-chain while also providing a loop-through.



MXCWAPT wireless access point transceiver 5 GHz / 2.4 GHz

The MXCWAPT Access Point Transceiver manages audio routing, frequency coordination, and system control for up to 125 wireless conference units.



K&M Mic Stands Short
Short Adjustable Boom Stand



K&M Mic Table Stand
Round Base Table



K&M Mic Floor Stands Medium
Floor Adjustable Boom Stand



K&M Mic Stand Long
Tall Adjustable Boom Stand



K&M Music Stand Light



K&M Music Stand



K&M Orchestra Conductor Stand



Manfrotto
Magic Arm Kit



FreeSpeak II® Digital Wireless Intercom Systems

FreeSpeak II is a five-channel, full-duplex wireless intercom solution, ideal for large-scale, complex designs or specialized applications—requiring team members to be untethered and talking in independent channels of communication.



FSII -Base

The FSII-BASE-II is a base station for the wireless FreeSpeak II 1.9 GHz and 2.4 GHz active transceiver antennas and belt packs.



FSII-BP19

The FSII-BP19 is a rugged, water-resistant belt pack that operates in the ISM license-free 1.9 GHz frequency range.



FSII-TCVR-19

The FSII-TCVR-19 is an active transceiver antenna for the FSII-BP19 belt packs. The antenna can be locally powered or powered via the FSII base station or matrix on shorter connections (less than 1000 ft).



FSII-SPL

The FSII-SPL is a splitter that connects multiple FreeSpeak II transceiver antennas to an Eclipse® HX matrix (via E-QUE-HX card) or a FreeSpeak II base station.



AC60

AC60 charger





Altair Master Base Station



Desk Remote Dual Channels



Single Channels Beltpack



Dual Channels Beltpack



Dual Channels Beltpack



**Rotatable mic-boom
Double Muff Headset**



**Rotatable mic-boom single
Muff Headset**



RADIOCOM BTR-800

Wireless Intercom System

The BTR system incorporates 2 audio channels beltpack operator of communications, with the base station tracking the beltpack selection, allowing the user to create a party and a private line within the same beltpack.



TELEX TR 800



Tempest2400 2.4GHz 4 Ch. Base Station

4-channel digital wireless BaseStation, 2.4GHz, license free operation, 2xTX redundant data transmission.



HelixNet four-channel Master Station

High Channel Density. Four independent inter-com channels and power for beltpacks transmitted over shielded twisted-pair.



Tempest2400 2.4GHz Remote Transceiver

Tempest 2.4GHz Remote Antenna Transceiver; power provided by Tempest2400 base station via CAT-5 cable up to 1500 feet (300 meters). Comes with 15 ft (4.5 m) CAT-5 cable and two whip antennas



Single-ear Headset

Single-ear headset features high ambient-noise attenuation headphones and a hyper-cardioid dynamic microphone that provide high quality audio.



HelixNet two-channel standard dual listen

Two channel beltpack, Power and Audio over a Single Cablem, Program Audio with Separate Program Level Control, User-Facing Keypad Controls, Recessed Level Rotary Knob Controls.



CC-300

The CC-300 (single-ear) headsets feature high performance headphones and cardioid dynamic microphone that provide high quality audio.



Tempest2400 2.4GHz 4 Ch. Belt Station

4-channel, full-duplex BeltStation, • 2.4GHz, license free operation, • Dual Talk/Listen operation.



CC-400

The CC-400 (double-ear) headsets feature high performance headphones and cardioid dynamic microphone that provide high quality audio.



NEUTRIK

Neutrik Xirium X Transmitter

Wireless audio distribution.



NEUTRIK

Neutrik Xirium X Direct Antenna

Direct antenna for xirium x, 60° x 40°.



NEUTRIK

Neutrik Xirium X Omni Antenna


Omni Antenna for xirium x, 360° x 10°



NEUTRIK

Neutrik Xirium X Receiver

Wireless audio distribution.

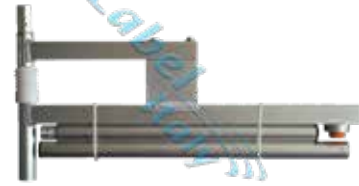

Label Italy AKSE/1N FM Antenna

FM wide band dipole, demountable and cheap, PVC insulator entirely of aluminum, light and resistant. It allows to reduce the shipping costs thanks to small size of packaging. All the metal parts are electrically grounded.



bw TX50 V2 FM Transmitter

Introducing the answer to your LPFM problem. This 50w 1RU FM transmitter is the perfect piece of equipment for you. Built in 4-band DSPX audio processing, Ethernet control and FSK IDer eliminates the need for any additional equipment.



ROLLS

RS81 Quartz PLL Synthesized AM/FM Tuner

The RS81 is a single rack space Phase Lock Loop digital AM/FM Tuner designed and built for professional applications such as remote radio station trucks and repeaters, church and school installations, as well as night clubs and restaurants.

A large, stylized white number '3' is centered within a vertical red bar that runs along the left edge of the page.

22⁺

BACKLINE

- STRING INSTRUMENTS
- PERCUSSION INSTRUMENTS
- PIANO



Fender

Fender 60th Anniversary American Stratocaster

Solid Body Electric Guitar



Fender

Fender American Precision Bass

Solid Body Electric Bass Guitar

K&M KÖNIG & MEYER
Musik für Musik



K&M Memphis 20
Floor guitar Stand



Fender

Fender De Luxe 112 Plus

94W Solid State 1x12" Combo Guitar Amplifier with Reverb.



BOSS

BOSS GT6B High end bass multi effects

Professional bass multi-effects processor with COSM technology.



BOSS

BOSS GT8 guitar effects processor

BOSS's most powerful floor multi-effects processor.



Marshall

Marshall MB4210

300W/450W 2x10" Hybrid Bass Combo Amp with HF Horn & Built in Compressor/Limiter.



Marshall

Marshall Mode Four MF350 Amplifier Head and MF400 4x12 Cabinet

350W Solid State Guitar Amplifier Head with Reverb & Matching Oversize 4x12 Cabinet.



PEAVEY

Peavey Classic 50 212

Guitar Amplifier



**TRACE
ELLIOT**

Trace Elliot 1210

Combo Bass Amplifier



Session Custom 5 pc drumkit

The Pearl Session Custom delivers a combination of Masters Series-level features. It's constructed of 100% pure maple with six plies per shell. 18"x24" Bass Drum, 9"x12" Tom Tom, 10"x13" Tom Tom, 16"x16" Floor Tom, 5.5"x14" Steel Snare.



PL52S Starclassic Performer 5 pc drumkit

By using bubinga wood for the inner layers of a birch shell, this mixture of birch and bubinga has created a new sound with a sweeter and deeper tone which exhibits the enhanced lows of bubinga. 18"x22" Bass Drum, 8"x10" Tom Tom, 9"x12" Tom Tom, 14"x16" Floor Tom, 5.5"x14" Snare Drum, and MTH909 Double Tom Holder.



Paiste 101 Brass 16" Crash
Paiste 101 Brass 20" Ride



Paiste 101 Brass 14" Hi-Hats



Meinl Byzance Vintage Cymbal 16" 18" 20"

Meinl Byzance Vintage Hi-Hat Cymbal 14"



Tama HP900PSWN

Tama Iron Cobra Power Glide Double Kick Drum Pedal



Tama HP900PSN

Tama Iron Cobra Power Glide Single Kick Drum Pedal.



LP Tunable Djembe

Aspire Red Wood



LP Bongos

Aspire Red Wood



LP Congas

Aspire (11+12) basket stand - Red Wood



YAMAHA
Baby Grand Piano



YAMAHA
Yamaha Motif ES8

88 key music production synthesizer workstation high quality sounds to spark your creativity.



YAMAHA
Clavinova Electric Piano



8+

SPECIAL EFFECTS

- HAZE, SMOKE AND LASER
- TEXTILES AND DRAPERIES



MVS Hazer

Dual high power variable speed fans, sweeping haze projection, low fluid consumption, can operate in any position.



Reel Efx DF-50

Diffusion Hazer

The safest, cleanest most cost effective atmospheric hazer.



MDG

Me2 Fog Machine

The Me2 Fog Generator was designed with safety and reliability in mind. It is capable of generating pure white, non-toxic fog for as long as you have fluid (100% duty cycle).



MAGIC:CFX

MAGICFX® Power Drop

Plug and play backdrop drop (kabuki) system, very strong - 20kgs capacity, powercon in/out.



LPS
LASERS & SPECIAL EFFECTS

LPS-BaX SixSCAN


This pure diode RGB Laser Scanner bar convinces with power, colorful output and six different scanners for different outputs at the same time. LPS-BaX SixSCAN is designed for all kind of professional staging and is available with different RGB laser power.



Show LED

3m x 12m
5m x 7.5m



Chameleon Star Cloth Super standard, fire retardant, full color RGB star-cloth + control kit.



Showtex Velvet

Velours Puccini 18 m x 12 m


theater red color, a light cotton velvet with flat pile and satin shine.

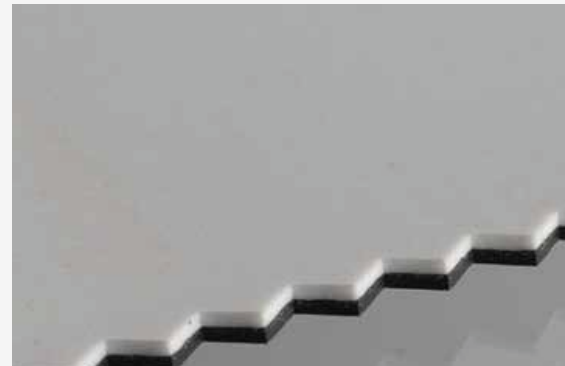

Showtex Dance Carpet

Double 0601 Black/Gray

Double sided Vinyl Dance Floor Carpet, Extremely lightweight dance floor ideal for touring.



Truss Sleeve, Black

30x30 truss
40x40 truss

Truss Sleeve fits smoothly arounds various truss sizes, inherently and permanently flame retardant.

5

36+

VIDEO

- SCREENS & CONTROLLERS
- PROJECTORS & LENSES
- TELEVISION AND STANDS



Absen NT 3.9W LED Screen

The NT3.9W can be customized as a floor display, which adds to the effect of the stage for an immersive viewing experience. This floor display solution is only suitable for 500*500mm panels. the NT series supports concave and convex connection to create various shapes and build a more creative stage.



Absen DV2, P2.9mm LED Screen

Kinglight led lamp, curved with two side locking system. Quick swappable power box, high mechanical accuracy die casting aluminum



Infiled GX II Series, P4.6mm LED Screen

The GX II Series is a lightweight LED display that features waterproof and dustproof design, offers creative mounting possibilities, and many more advantages for indoor and outdoor rental applications. Its upgraded design with enhanced corner protection prevents the LED diodes from physical damage.





MIG-H9 4K Event Console

MIG-H9 supports 3 external signal inputs, and the console display can be used for four-screen display. Centralized management of multiple external signals, easily control the whole scene.



MIG-V16 Series 4K Switcher

MIG-V16 supports 8 point-to-point large background images storage. One-click switching without black, give you perfect control. Single machine supports maximum 48 layers. Layers can be cropped, with border effects, etc.



LED W4000-2DH Video Processor

LED-W4000 series is an 8K x 2K video processor which integrates multiple functions such as mosaic, switch and multi-window display.



LED Video Processor MIG-780H



H2 Video Processor

The H2 is part of NovaStar's latest generation of video wall splicers, which feature outstanding image quality and are specifically designed for fine-pitch LED displays.




LED Display Controller MCTRL4K

A single unit features a loading capacity of up to 4096x2160@60Hz. It supports any custom resolutions with the maximum width or height up to 7680 pixels, meeting the on-site configuration requirements of ultra-long or ultra-wide LED displays.



J6 Video Processor

Supports a wide range of video inputs divided into 4 groups with 8 connectors, including 1x HDMI (or VGA, or DVI), 4x DVI, 2x SDI, and 1x DualLink DVI (or HDMI 1.4, or DP1.1).



LED Display Controller MCTRL660

It has adopted Nova G4 engine, which makes the screen stable and flicker free without scanning lines. The images become exquisite and bring a good sense of depth.



Blackmagic ATEM Mini Pro ISO

Affordable live switcher with 4 standards converted HDMI inputs, USB webcam out, audio mixer with EQ and dynamics, 2D DVE, transitions, green screen chroma key, 20 stills for titles and much more.



AKAI Professional APC40MKII Controller

APC40 mkII features a 5x8 RGB clip-launching grid that's built for dexterous exploration: launch clips and create or perform your song from the ground up using 40 responsive triggers.



SONY
BRC-X400

The versatile BRC-X400 PTZ camera is ideal for use in a wide range of environments - from broadcast studios and remote on-air suites to sports stadiums, arenas, houses of worship and lecture halls.



SONY
RM-IP

IP remote control panel for BRC cameras



Dataton Watchpax 62 Media Server 4K

The WATCHPAX 62 series comprises four performance-optimized models from the lean four-output model S to the high-end model C with up to twelve outputs.



Dataton Watchout Watchpax 42 Media Server 4K

WATCHPAX 42 features a high-performance four-channel output configuration housed in a compact, rack-mountable case.



Datapath FX4-HDR Controller

The Datapath Fx4-HDR builds on the success of its award winning Fx4 and x4 predecessors and brings the superb HDR 10-bit colour clarity, 4K60 resolution as well as audio support into the mix.

Stacking

- twin cheeseboro
- tube 1700mm
- docking lock
- 1m stacking stacker
- GXmk2 stacking ski 1045mm
- GXmk2 1 x footer 1000mm
- GXmk2 1 x footer 500mm

Base Footer

2M



Hanging Bar

- 0.50 meters
- 1 meter

Foot Support

- 80 cm
- 60 cm
- 40 cm

Hanging Bar Curved

- 0.50 meters
- 1 meter

Ground Support

- Truss F32 1 meter
- Truss F32 1.50 meter



Panasonic

PT-DZ21K2 DLP Projector SXGA Resolution

Real Motion Processor combines Frame-Creation and 120 Hz processing for fluid motion reproduction. Next-generation Detail Clarity Processor delivers crisp and detailed image quality.



Panasonic

ET-D75LE20 Lens 1, 7-2, 4:1 HD & WUXGA

For Panasonic 3-chip projectors. Throw ratio 1,7-2,4:1.

ET-D75LE30 Lens 2, 4-4, 7:1 HD & WUXGA

For Panasonic 3-chip projectors. Throw ratio 2,4-4,7:1.

ET-D75LE6 Lens 3, 0.9-1.1:1 HD & WUXGA

For Panasonic 3-chip projectors. Throw ratio 0.9 - 1.1:1



EPSON
EXCEED YOUR VISION

EB-L20000U

The EB-L20000U offers an incredible resolution (native WUXGA) and a host of features that hugely benefit the rental and installation sector; such as backwards lens compatibility and exchangeable interface boards. It's been designed to fill the industry requirement for 20,000-lumen projection, and to slot into an existing infrastructure.



EPSON
EXCEED YOUR VISION

Epson ELPLL08 Lens 1, Long Throw Lens

5.09 to 7.16 throw ratio

Epson ELPLM10 Lens 2, Middle Throw Lens

2.34 to 3.59 throw ratio

Epson ELPLW08 Lens 3, Wide Throw Lens

.83 to 1.17 throw ratio



EPSON
EXCEED YOUR VISION

EB-L1050U 5500 Lumens

The Eb-L1050u Is A Fit-And-Forget, 3lcd, Laser Installation Projector That Supports Interchangeable Lenses. It'S Designed For Scenarios That Demand Large, Detailed And Powerful Images.



EPSON
EXCEED YOUR VISION

EPSON Lens ELPLM08

This middle throw zoom lens is ideal for projecting large, high-quality images. Supports screen sizes from 50" to 500". This is the standard throw lens for Pro L projectors up to 8,500 lumens.



BARCO

RLM-W8


With an enhanced contrast, quick and creative stacking options as well as built-in warping capabilities for curved surfaces, it is a versatile choice for mid- to large-sized venues.



BARCO

RLD W Lens (1.45 - 1.74 : 1)

Is compatible with the Barco RLM-W6 and RLM-W8 three-chip DLP projectors. The lens is a RLD W type lens.

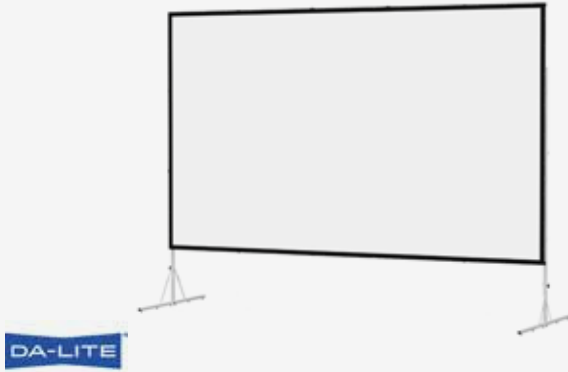


Fast-Fold Deluxe Screen System

Frame and legs made of 1 1/4" aluminum tubing , Black anodized frame option available upon request, Easy release latches, Standard black-backed foldable material for superior image quality and opacity, Seamless surfaces in all sizes



Project-O-Stand


The Project-O-Stand with telescoping aluminum legs is easy to transport. The non-skid platform supports up to 125 lbs. with legs completely extended. and it can be used for projectors, speakers, audio-visual or multi-media components.



FrontScreen Supermat MicroPerforato

12m x 6.75m

Outdoor front projection, fire retardant and weather proof



Showtex Retro Projection Screen

12m x 18m

3m x 4m

9m x 3m

Off white translucent fire retardant



Projector Screen

6" x 6" screen with tri-pod stand.



SONY
Sony 3D TV
75" / 70" / 60"



SONY
Sony LED TV
43" / 32"



SAMSUNG
Samsung 55" LED 7 Series



SAMSUNG
Samsung 55" LCD 6 Series



SAMSUNG
43" The Sero QLED Smart TV

The Sero's rotating screen displays



Hisense
Hisense 4K UHD Smart LED TV 75"



Hisense
Hisense 4K UHD Smart QLED TV 85"



Black Glass TV Stands



Portable LED TV Stands



64⁺

STAGE, TRUSS & ROOF SYSTEM

- STAGING & ROOF SYSTEM
- TRUSSES & PLATFORM LIST
- BARRIERS



Stage Platform

2m x 1m with adjustable legs.



Stage Decks Steel

01	Aluminum Supporter Center		800 units
02	Jack	50 cm	200 units
03	Jack	90 cm	150 units
04	Steel Frame	2.4 m	430 units
05	Steel Frame	1.2 m	410 units
06	Steel Legs	0.30 m	84 units
07	Steel Legs	0.50 m	75 units
08	Steel Legs	0.80 m	500 units
09	Steel Legs	1 m	250 units
10	Steel Legs	1.3 m	24 units
11	Steel Legs	1.8 m	65 units
12	Steel Legs	3 m	95 units



Trusses

01	Global Truss Roof System	12x10 Meters	2 units
02	Global Truss Roof System	18x18 Meters	1 unit
03	Global Truss Roof System	20x18 Meters	1 unit
04	Global Truss Roof System	24x24 Meters	1 unit
05	Global Truss Speaker Towers	Speaker Towers 9m High 1Ton	4 units

QUANTITY IN STOCK	DESCRIPTION	QUANTITY IN STOCK	DESCRIPTION
12	Global Truss F9070-0.5m	16	Global Truss F34-0.5m
11	Global Truss F9070-2m	40	Global Truss F34-1m
10	Global Truss F9070-3m	6	Global Truss F34-2m
22	Global Truss F9070-4m	48	Global Truss F34-3m
8	Global Truss F7652-0.5m	24	Global Truss F34-4m
18	Global Truss F7652-2m	32	Global Truss F44 Corner Block
6	Global Truss F7652-2.25m	20	Global Truss F44 Book Corner
6	Global Truss F7652-2.5m	14	F44 Base Plate
13	Global Truss F7652-3m	1	Global Truss F44-25 Circle
30	Global Truss F7652-4m	1	Global Truss F44-15 Circle
16	Global Truss F44-0.5m	1	Global Truss F44-12 Circle
16	Global Truss F44-1m	1	Global Truss F34-9 Circle
12	Global Truss F44-1.5m	1	Global Truss F34-6 Circle
11	Global Truss F44-2m	2	Global Truss F34-4 Circle
60	Global Truss F44-2.5m	1	Global Truss F32-6 Circle
70	Global Truss F44-3m	2	Global Truss F32-4 Circle
24	Global Truss F44-4m	40	Global Truss F34-0.5m Black
12	Global Truss F44-0.5 Ladder	20	Global Truss F34-1m Black
14	Global Truss F44-1 Ladder	40	Global Truss F34-2m Black
32	Global Truss F33-3m	12	Global Truss F34-3m Black
24	Global Truss F33-3m Black	14	Global Truss F44-3m Black
16	Global Truss F44-2 Ladder	2	Global Truss F44-2.5m Black
34	Global Truss F44-3 Ladder	3	Global Truss F44-1.5m Black
		6	Global Truss F44-1m Black



EUROTRUSS

TT Truss

QUANTITY IN STOCK	DESCRIPTION
5	TT Cornerblock, 1-4 directions, 101x85cm
80	85mm Bold on receiver for TT/XT/ST Cornerblocks / Sleeveblocks
12	TT-400, 4m Rectangle Truss Length, 101x58cm, 60mm Main Tube diameter, 5mm wall thickness
12	TT-300, 3m Rectangle Truss Length, 101x58cm, 60mm Main Tube diameter, 5mm wall thickness
12	TT-250, 2.5m Rectangle Truss Length, 101x58cm, 60mm Main Tube diameter, 5mm wall thickness
12	TT-150, 1.5m Rectangle Truss Length, 101x58cm, 60mm Main Tube diameter, 5mm wall thickness
240	Conical Connector for Truss Systems TT, ST, FT, TD50, PRT & CWT
480	Single Conical Truss Pin for CS3-CON, TT/XT/ST/FT Truss Systems
480	R-Clip 3mm for CS3-CON, TT/XT/ST/FT Truss Systems
4	TD/FD/HD44 Cornerblock Sleeve for TT Truss Attachment
4	Sleeveplate incl. wheels
4	Sleeveplate incl. wheels + hanging point



EUROTRUSS

TD44-Towers

QUANTITY IN STOCK	DESCRIPTION
4	TD44 Tower Top Part for 1 Ton Chain Hoists
16	TD44, 3m Tower Mast, 40x40cm
4	TD44, 2m Tower Mast, 40x40cm
4	TD44 Tower Mast L=150cm
4	Steel base on wheels for Truss Towers
16	Long Outrigger for Tower Steel Base
16	Stabilizer Bar for use with TD44-150 L=107,5cm
8	Single Hingeset Left Connection for FD/HD/TD 34/44 Towers
8	Single Hingeset Right Connection for FD/HD/TD 34/44 Towers
100	Single Conical Connector for FD/HD Truss Systems (Spigot)
232	Single Conical Truss Pin for CS1-CON, FD/HD Truss Systems
232	R-Clip 2mm for CS1-CON, FD/HD Truss Systems



EUROTRUSS

Span Cables

QUANTITY IN STOCK	DESCRIPTION
12	X Wire Plate
8	Jaw & Jaw Turnbuckle 1" x12" , Capacity 4.5Tonne
8	Eller Bow Shackle, 3 Tons WLL
4	Eller 1m Softsteel Polyester Round Sling, 2 Tons WLL
8	8-291K-023 YOKE - KEY EYE POINT SWIVEL TYPE SIZE M20 x 2.5, THREAD LENGTH 30MM, Working Load Limit 2.3 (6) TON
8	Eller Bow Shackle, 3 Tons WLL
8	Wire rope sling c/ thimble eye both end, 12mm x 13550mm
8	Jaw & Jaw Turnbuckle 3/4/" x 12" -5734.34.12



EUROTRUSS

Tower Erecting System

QUANTITY IN STOCK	DESCRIPTION
1	Tower Erect. System for TD44 Tower TT rig combi out/inside




EUROTRUSS

Steel Ballast Base Plate

QUANTITY IN STOCK	DESCRIPTION
4	Steel Ballast Base Black with wheels TD44

Wire Plate

QUANTITY IN STOCK	DESCRIPTION
12	X Wire Plate BUSH for TT Truss

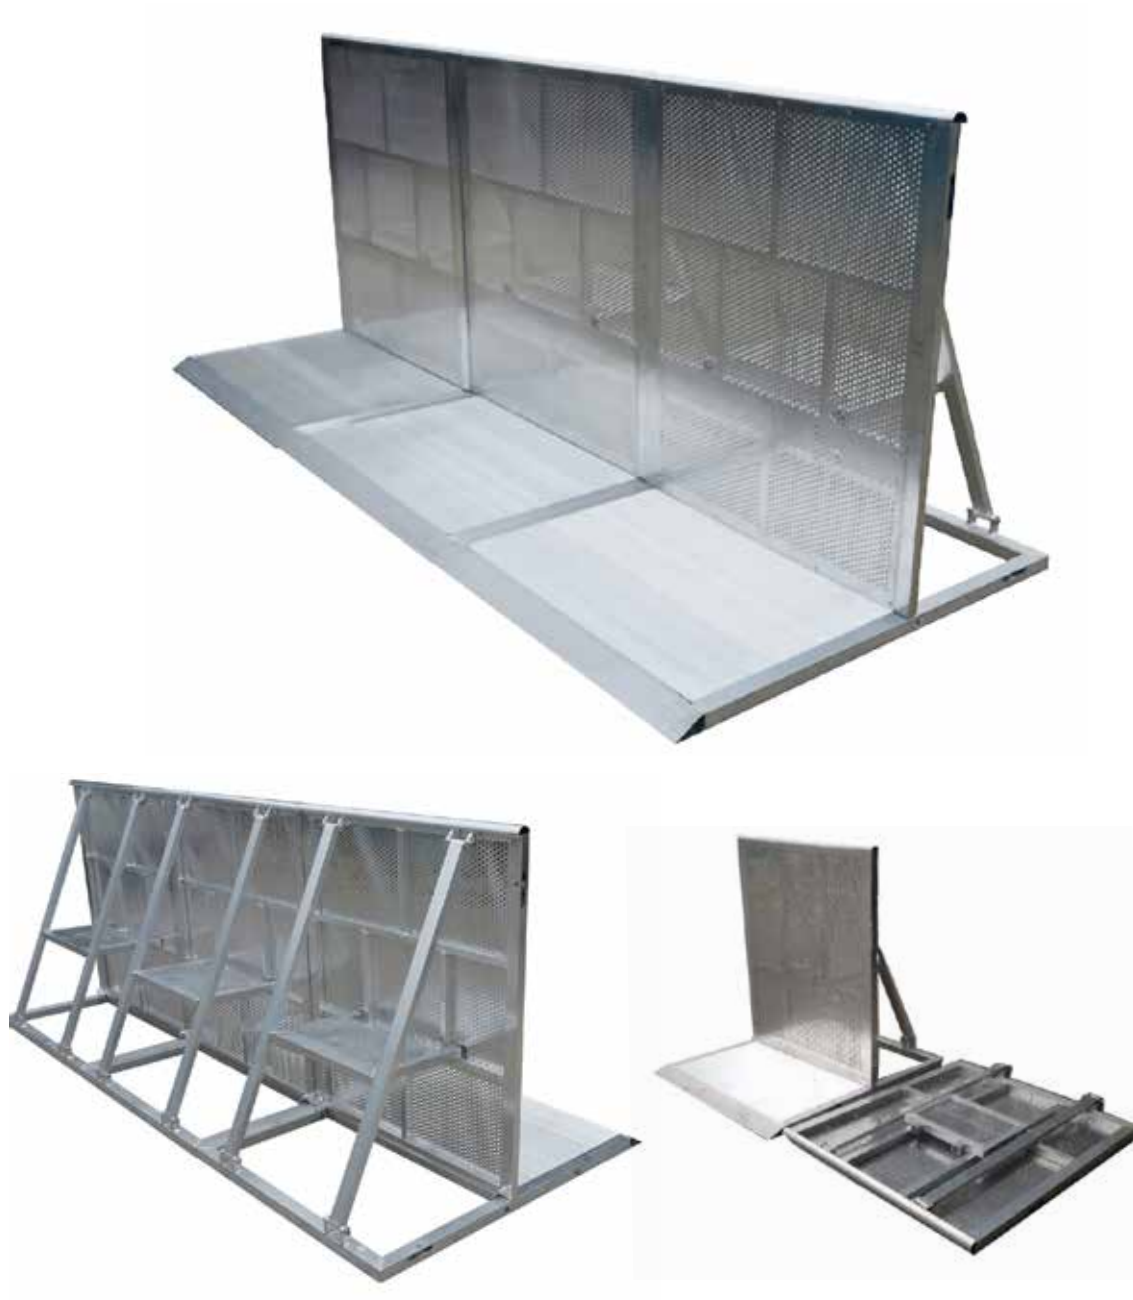

Crowd Barrier

High Quality crowd barrier.

Size : 1 meter (L), 1.25 meter (W), 1.2 meter (H)

Folding Size : 1265 x 1100 x 18 mm



RIGGING 9+

- HOISTS, CONTROLLERS AND ACCESSORIES



SM 10

Capacity of 1000 kg

The STAGEMAKER® COMPACT is designed for handling stage and theatre equipment, ensuring safe and precise positioning of speakers, lighting systems, stage sets, sceneries, etc.



SM 5

Capacity of 500 kg

The STAGEMAKER® COMPACT is designed for handling stage and theatre equipment, ensuring safe and precise positioning of speakers, lighting systems, stage sets, sceneries, etc.



BGV-D8 Chain Hoists

Capacity of 2000 kg

The carefully designed aluminium housing means our chain hoists are both compact and robust. The combined chain guide and chain guide plate are unique and ensure smooth chain payout. Thanks to the wide range of additional products available, it can be adapted for use in any situation.



BVG-D8 250Kg

Capacity 250 kg

The compact form, robust aluminium casing and low unladen weight of ChainMaster rigging lifts guarantee optimal handling in day-to-day use. Climbing or Standard Suspension, Light and compact Housing, Direct- or Contactor Control.



FENIX
HERCULES 8 stand



FENIX
HERCULES 6.5 stand



FENIX
ELC-206/6 Lifting Tower



Manual Stand Hoist 6.5m



Stand
100 Kgs.



18⁺

DISTRIBUTION BOARDS

- ELECTRICAL DISTRIBUTION BOARDS



Rubber Box Co Ltd

Rubberbox

400A powercase



Rubber Box Co Ltd

Rubberbox Rub270H3

63A to 32A Single Phase distribution box



Rubber Box Co Ltd

Rubberbox Rub4201

125A distribution box



Rubber Box Co Ltd

Rubberbox Rub270H

63A to 16A distribution box



Rubber Box Co Ltd

Rubberbox Rub270H

63A to 32A distribution box



Rubber Box Co Ltd

Rubberbox RubSSP163

16A splitter



Rubber Box Co Ltd

Rubberbox OSC2



Rubber Box Co Ltd

Rubberbox RubTR5

16A Triangle break out



Rubber Box Co Ltd

Rubberbox RubTR1

16A triangle break out box



SOCAPEX
Major Power



Raygun Splitter
16A splitter



Rubberbox RubTR2

13A triangle break out box



Rubberbox RubSST16

Socapex to 6 x16A Single Phase breakout with Truss Clamps



Rubberbox Rub1402

Small break out with 63A in with 2 x32A out



Rubberbox Rub971

1 x16A to 4 x13A Plugstrip



Rubberbox Rub1306P2

Powercon break out



Electrical DB

Distribution box 1 x63A single phase in 8 x32A single phase out.



Electrical DB

Distribution box 1 x32A single phase in 4 x16A and 4 x13A single phase out.



Electrical DB

Distribution box 32A single phase in 6 x13A single phase out.



Electrical DB

Main distribution 63A in with 3 x63A single phase out.



Electrical DB

Distribution box 2x32/5, 5x16/3

9

8⁺

FIBER CONNECTION & CABLE

- HDMI FIBER CONNECTION AND CABLE



HDMI 4-Way RX
HDMI 4-Way TX

4 self-sufficient 4K HDMI fiber connections per unit. Resolutions up to 3840x2160p@60Hz.



Black Box DVI to Fiber LC

Extend or Distribute DVI-D video and stereo audio up to 1.5 km over a single strand of single-mode, or 500 m of multi-mode fibre.



Optics HDFX-500 Fiber to HDMI

4K One Fiber HDMI 2.0 Extender



Gefen DVI to Fiber SC

Is a fiber optic extender that allows users to extend their DVI display up to 3,280' (1km) away from the video source.



150 meter Fiber Cable

100 meter Fiber Cable

Rugged environment cable mounted to expanded beam plugs on a special rubber cable drum OCD-R



Neutrik opticalCON

250m rugged and lightweight mobile field cable.



DTECH Ultra Slim Fiber Optic 8m
DTECH Ultra Slim Fiber Optic 15m
DTECH Ultra Slim Fiber Optic 60m



LC Fiber Cable Reel 200m Shielded 4Way
SC Fiber Cable Reel 200m Shielded 4Way

10

TRANSPORT
& TRUCKING
SYSTEM



CREATIVE COMMUNICATION GROUP Ltd.

All equipment listed in this brochure is solely owned by Creative Communication Group Ltd. and is for use in event productions staged by CCG or for rental purposes to third parties.

We at CCG are always keen to update our inventory and we do have a wide range of equipment other than listed in this brochure, so would you like to know more information, here is how you could contact us according to your inquiry:

For Management & Financial, please contact :

Jalal Dudin

Cheif Executive Officer

Email: jalal.dudin@ccg-events.com

For Logistics Inquiries, please contact our Operation & Logistics Department:

Sofian Dudin

Director of Operations & Logistics Manager

Email: sofian.dudin@ccg-events.com

Maria Bou Abdallah

Production Director

Email: maria.bouabdallah@ccg-events.com

For Technical Inquiries, please contact our Technical Support Department:

Michel Khairallah

Head of Dept. - Light

Email: michel.k@ccg-events.com

Shaun Brown

Head of Dept. - Sound

Email: shaun.brown@ccg-events.com

Doha - Qatar

Villa No.5, Bin Mahmoud Street, P.O. Box 8626 Doha Qatar
Tel.: +974 44373971 - +974 44373461
Fax: +974 44373427

Abu Dhabi - UAE

TwoFour54 Lime Green Building Penthouse Floor, P.O. Box 77937 Abu Dhabi UAE
Tel: +971 2 4448400
Fax: +971 2 4448401

Kuwait

Al Soor st, Al Mirqab, P.O.Box 735 Safat 13008 - Kuwait
Tel: +965 2200 6000
Fax: +965 9808 7658

E-mail: admin@ccg-events.com
Website: www.ccg-events.com

© Creative Communication Group All Rights Reserved 2024

CREATIVE COMMUNICATION GROUP Ltd.